PPLU3XFLCUCH



Propel ULL Multimode OM4 Cabled Module, 2x24f duplex LC Propel module on End A to Stub on End B, 48 fiber B2ca Trunk, Method B Enhanced

- This component requires 6 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

General Specifications

Configuration Type PROPEL Module to Stub

Cable Color Aqua

Cable Type Trunk Cable - LSZH Class B2ca

Interface, front LC/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, frontAquaInterface, rearStubModule Size, end A24 fiber

Module Quantity, end A 2

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 48

Total Ports, quantity, front 24

Dimensions

Height 11 mm | 0.433 in

COMMSCOPE®

PPLU3XFLCUCH

Width 131 mm | 5.157 in


Depth 170 mm | 6.693 in

Breakout Length, end B 0 in

Cable Assembly Length Range (m) 1 - 400

Cable Assembly Length Range (ft) 2 - 999

Ordering Tree

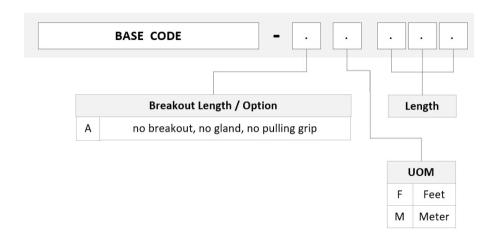

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4

Insertion Loss, maximum 0.35 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

Page 2 of 3



PPLU3XFLCUCH

UK-ROHS

Compliant/Exempted



Included Products

760249075 N-048-MP-5K-F24AQ/30T/B2 Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 48 fiber with 24-fiber, 3.0 mm subunits, Multimode OM4, Feet jacket marking, Aqua jacket color, B2ca flame rating