# PPLUQV8LCLC8



Propel ULL Multimode OM5 Cabled Module, 1x4 duplex LC Propel module on End A to 1x4 duplex LC Propel Module on End B, 8 fiber Plenum patch cord cable, Method B Enhanced

- This component requires 2 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

### Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	SYSTIMAX®
Product Type	Fiber cabled module
Product Brand	Propel
Product Series	PPL
Ordering Note	End B module is the same module as End A   Modules with patch cord cable are single subunit, and have no additional outer jacket

## General Specifications

Configuration Type	PROPEL Module to PROPEL Module
Cable Color	Lime green
Cable Type	Patch cord Plenum
Interface, front	LC/UPC
Interface Feature, front	Duplex   Shuttered
Interface Color, front	Lime green
Interface, rear	LC/UPC
Interface Feature, rear	Duplex   Shuttered
Interface Color, rear	Lime green
Module Size, end A	8 fiber
Module Size, end B	8 fiber
Module Quantity, end A	1
Module Quantity, end B	1
Polarity	Method B Enhanced (ULL)

Page 1 of 3


©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 24, 2024



# PPLUQV8LCLC8

Total Fibers, quantity	8
Total Ports, quantity, front	4
Total Ports, quantity, rear	4
Dimensions	
Height	11 mm   0.433 in
Width	65 mm   2.559 in
Depth	170 mm   6.693 in
Breakout Length, end B	23 in
Cable Assembly Length Range (m)	1 - 400
Cable Assembly Length Range (ft)	2 – 999

# Ordering Tree

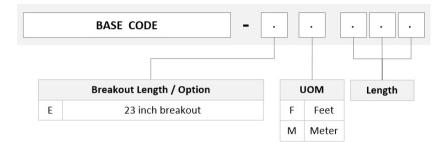

### Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM5
Insertion Loss, maximum	0.35 dB

### **Environmental Specifications**

Qualification Standards	IEC 61753-1   TIA-568.3-D
Safety Standard	c-UL-us

1

### Packaging and Weights

#### Packaging quantity

## Regulatory Compliance/Certifications

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 24, 2024



# PPLUQV8LCLC8

Classification

Compliant/Exempted

Compliant/Exempted

Above maximum concentration value

#### Agency

#### CHINA-ROHS

ROHS

## UK-ROHS



# Included Products

760253105 P-008-MP-5G-F20LM Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 8 fiber, Multimode OM5, Feet jacket marking, Lime green jacket color

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 24, 2024

