## SFG23-14-3-126



G23 High Capacity Sector Frame, 14.5 ft face, includes three 126 in pipes; For patents, see www.cs-pat.com

#### **OBSOLETE**

This product was discontinued on: March 22, 2023

Replaced By:

SFG23HDX-14-4-126 G23HDX High Capacity Sector Frame, 14.5 ft x 2.88 in OD face pipes, includes four 2.88 OD x 126 in

antenna pipes

#### Product Classification

**Product Type** High capacity Tower sector frame

## General Specifications

**Application** 4G LTE antenna/radio mount

Mounting Angle 60°, 203.2 mm (8 in) | Straight or tapered legs up to 203.2 mm (8 in) OD

Patent Number Patent pending

Pipe, quantity 3

Tower Taper Non-tapered | Tapered

#### Dimensions

 Height
 3,200.4 mm | 126 in

 Face Width
 4.42 m | 14.5 ft

**Width** 4,419.6 mm | 174 in

 Pipe Length
 3,200.4 mm | 126 in

Face Support Pipe Diameter 60.325 mm | 2.375 in

Mounting Diameter, maximum 218.44 mm | 8.6 in

**Mounting Diameter, minimum** 38.1 mm | 1.5 in


Pipe Outer Diameter 60.325 mm | 2.375 in

**Stand-off Distance** 1,226.82 mm | 48.3 in



# SFG23-14-3-126

## Outline Drawing

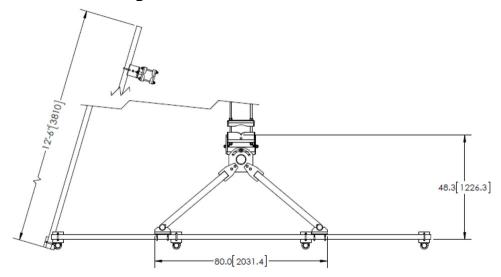

### Material Specifications

Material Type Hot dip galvanized steel

### Mechanical Specifications

Wind Rating For Specifications, please contact your local ANDREW representative

Wind Rating Test Method TIA/EIA-222-G

## Packaging and Weights

Included Frame | Pipe mounts | Plain end pipes (3) | Stiff arm | Tower attachment

Packaging quantity 1

**Weight, net** 378.75 kg | 835 lb

#### Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

#### \* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code

