

OBSOLETE

Replaced By:

SFG23HDX-12-4-96

Product Classification

General Specifications


| Tower Taper | Non-tapered | Tapered |
|-------------|-------------|---------|
|-------------|-------------|---------|

Dimensions

Stand-off Distance 1,226.82 mm | 48.3 in

SFG23HD-12-4-96

Outline Drawing

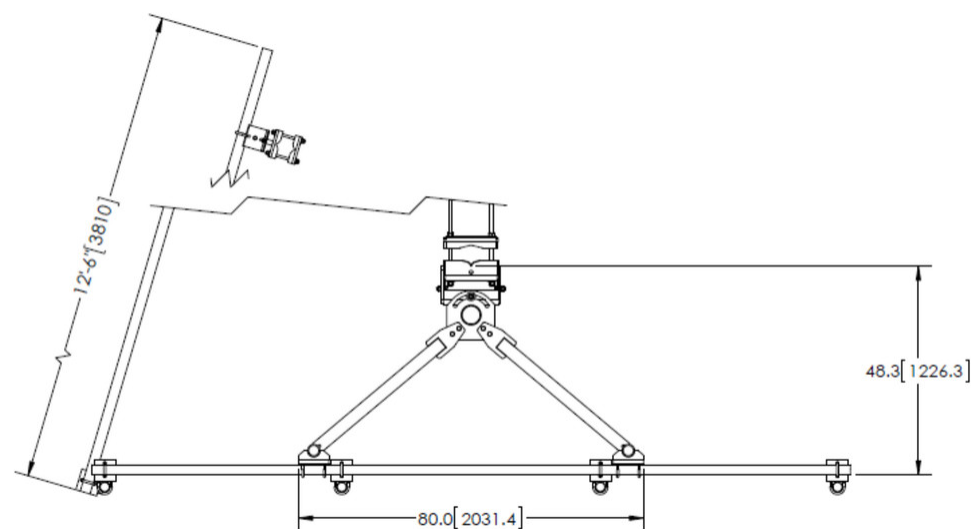

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating For Specifications, please contact your local ANDREW representative

Wind Rating Test Method TIA/EIA-222-G

Packaging and Weights

Included Frame | Pipe mounts | Plain end pipes (4) | Stiff arm | Tower attachment

Packaging quantity 1

Weight, net 367.863 kg | 811 lb

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code