# WT-SPM12-9-126



Stackable Pod Mount Assembly, 3-sector platform, 12 ft face, nine 2-3/8 in OD x 126 in plain end pipes included

#### **Product Classification**

**Product Type** Water tower mount

### General Specifications

**Mounting** Hatch plate

Pipe, quantity 9
Sectors, quantity 3

#### Dimensions

**Height** 3,200.4 mm | 126 in

**Face Width** 3.81 m | 12.5 ft

 Width
 3810 mm | 150 in

 Length
 3810 mm | 150 in


 Pipe Length
 3,200.4 mm | 126 in

Compatible Diameter 1,219.2 mm | 48 in

Pipe Outer Diameter 60.96 mm | 2.4 in

# WT-SPM12-9-126

### Outline Drawing

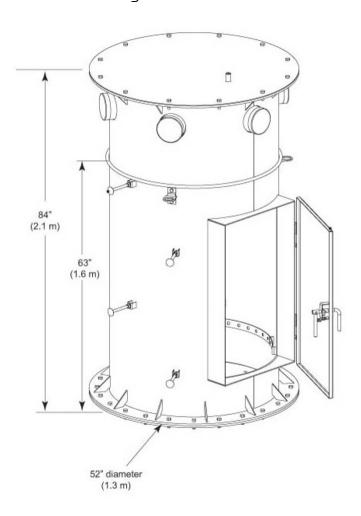

### Material Specifications

Material Type Hot dip galvanized steel

### Packaging and Weights

Included Mount | Plain end pipes (9) | Platform

Packaging quantity 1

**Weight, net** 1,383.82 kg | 3,050.8 lb

### Regulatory Compliance/Certifications

Agency Classification



# WT-SPM12-9-126

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

#### Included Products

MC-RM3060-3 – Universal Ring Mount, 30 in to 60 in OD

MT-196 – Low Profile Co-location Base Platform, 12 ft face. Ring Mount & Antenna Pipes Sold

Separately.

MT-220-120 – Pipe Mount Kit, 2-3/8 in OD x 126 in

WT-SPM-B – Stackable Pod Mount Assembly, platform and plain end pipe not included



## MC-RM3060-3



#### Universal Ring Mount, 30 in to 60 in OD

**Product Classification** 

Product Type Universal ring mount

General Specifications

**Monopole**, 762–1524 mm (30–60 in) OD

Pipe, quantity 0
Sectors, quantity 3

Dimensions

 Height
 254 mm | 10 in

 Length
 152.4 mm | 6 in

 Mounting Diameter, maximum
 1524 mm | 60 in

 Mounting Diameter, minimum
 762 mm | 30 in

Pipe Outer Diameter 0 mm | 0 in

Mounting Circumference, maximum4,785.36 mm | 188.4 inMounting Circumference, minimum2,392.68 mm | 94.2 in

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 140 mph (BWS) at 150 ft AGL | 160 mph (3-second gust) at 150 ft AGL using Exposure D

per FBC

**Wind Rating Criteria** Four 72 in x 8 in panel antennas per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

**Included** Mount | Threaded rod



# MC-RM3060-3

Packaging quantity 1

**Weight, net** 140.614 kg | 310 lb

### Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system


ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



### \* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code





Low Profile Co-location Base Platform, 12 ft face. Ring Mount & Antenna Pipes Sold Separately.

#### **Product Classification**

**Product Type** Monopole platform kit

General Specifications

**Mounting** Ring mount

Sectors, quantity 3

**Dimensions** 

Height 254 mm | 10 in **Face Width** 3.81 m | 12.5 ft Width 3810 mm | 150 in Length 914.4 mm | 36 in **Face Support Pipe Diameter** 88.9 mm | 3.5 in **Mounting Diameter, maximum** 762 mm | 30 in Mounting Diameter, minimum 254 mm | 10 in **Pipe Outer Diameter** 0 mm | 0 in

Material Specifications

Material Type Hot dip galvanized steel

Mechanical Specifications

Wind Rating 120 mph (BWS) at 150 ft AGL | 140 mph (3-second gust) at 150 ft AGL using Exposure D per FBC

**Wind Rating Criteria** Four 72 in x 8 in panel antennas per sector

Wind Rating Test Method TIA/EIA-222

Packaging and Weights

**Included** Platform

Packaging quantity 1

ANDREW® an Amphenol company

# MT-196

**Weight, net** 509.52 kg | 1,123.3 lb

### Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

REACH-SVHC Compliant as per SVHC revision on www.andrew.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



### \* Footnotes

Wind Rating BWS—Base Wind Speed; FBC—Florida Building Code



### MT-220-120



#### Pipe Mount Kit, 2-3/8 in OD x 126 in

#### **Product Classification**

**Product Type** Pipe mount kit

#### General Specifications

**Mounting** Pipe, 88.9 mm (3-1/2 in) OD

Pipe, quantity 1

#### Dimensions

**Height** 3,200.4 mm | 126 in

 Width
 127 mm | 5 in

 Length
 127 mm | 5 in

 Pipe Length
 3,200.4 mm | 126 in

 Pipe Outer Diameter
 60.96 mm | 2.4 in

### Material Specifications

Material Type Hot dip galvanized steel

### Packaging and Weights

Included Crossover bracket | Plain end pipes | U-bolts

Packaging quantity 1

**Weight, net** 22.1 kg | 48.722 lb

### Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



# WT-SPM-B



Stackable Pod Mount Assembly, platform and plain end pipe not included

#### **Product Classification**

**Product Type** Water tower mount

### General Specifications

**Mounting** Hatch plate

#### Dimensions

 Height
 1,320.8 mm
 | 52 in

 Width
 1,320.8 mm
 | 52 in


 Length
 2,133.6 mm
 | 84 in

 Compatible Diameter
 1,219.2 mm
 | 48 in

 Pipe Outer Diameter
 1,066.8 mm
 | 42 in

# WT-SPM-B

### Outline Drawing

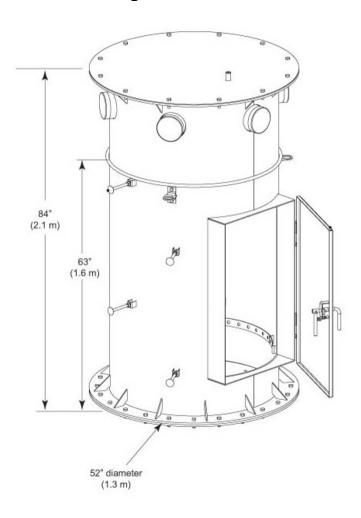

### Material Specifications

Material Type Hot dip galvanized steel

### Packaging and Weights

Included Hardware | Mount

Packaging quantity 1

**Weight, net** 603.822 kg | 1,331.2 lb

### Regulatory Compliance/Certifications

Agency Classification

ANDREW® an Amphenol company

# WT-SPM-B

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

