


# CQX6192123-DS-43 | E12F23P03



Quadplexer, 617-894/PCS/AWS/WCS, DC Sense, 4.3-10

- BTS-to-feeder and feeder-to-antenna application
- Automatic dc switching with dc sense
- Convertible mounting brackets
- New 4.3-10 connectors for improved PIM performance and size reduction
- DC Load Sense in Feeder-to-Antenna applications

## Product Classification

**Product Type** Quadplexer


## General Specifications

<b>Color</b>	Gray
<b>Common Port Label</b>	Common
<b>Modularity</b>	1-Single
<b>Mounting</b>	Pole   Wall
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Interface Body Style</b>	Long neck

## Dimensions

<b>Height</b>	185 mm   7.283 in
<b>Width</b>	255 mm   10.039 in
<b>Depth</b>	59 mm   2.323 in
<b>Ground Screw Diameter</b>	6 mm   0.236 in

## Outline Drawing

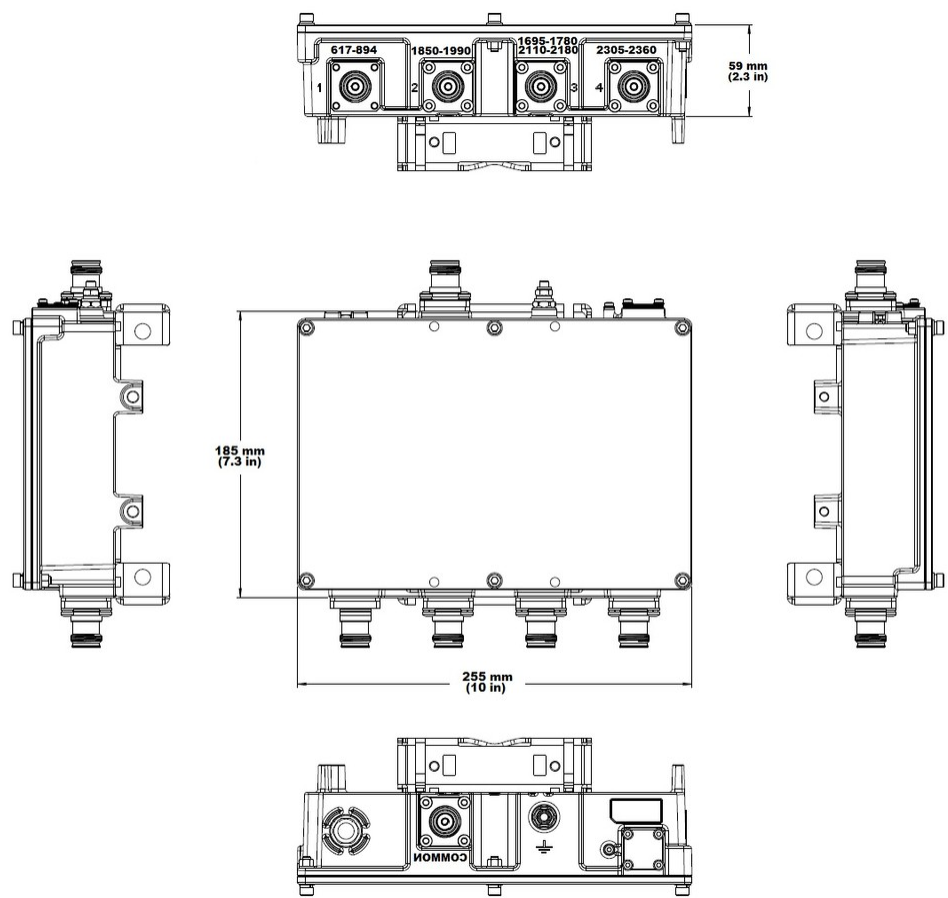

Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	AWS 1700   CEL 850   LMR 750   PCS 1900   USA 600   USA 700   USA 750   WCS 2300

Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Auto sensing
dc/AISG Pass-through Path	See logic table
Lightning Surge Current	10 kA
Lightning Surge Current Waveform	8/20 waveform
Operating Current at Voltage	15 mA @ 12 V   15 mA @ 24 V
Voltage	7–30 Vdc

Electrical Specifications, AISG

# CQX6192123-DS-43 | E12F23P03

AISG Carrier	2176 KHz ± 100 ppm
Insertion Loss, maximum	1 dB
Return Loss, minimum	15 dB


## Electrical Specifications

Sub-module	1	1	1	1
Branch	1	2	3	4
Port Designation	617-894	PCS	AWS	WCS
License Band	CEL 850, Band Pass USA 700, Band Pass USA 750, Band Pass USA 600, Band Pass	PCS 1900, Band Pass	LMR 750, Band Pass USA 700, Band Pass USA 750, Band Pass	WCS 2300, Band Pass

## Electrical Specifications, Band Pass

Frequency Range, MHz	617–894	1850–1990	1695–1780 2110–2180	2305–2360
Insertion Loss, typical, dB	0.3	0.3	0.3	0.3
Total Group Delay, maximum, ns	5	30	25	25
Return Loss, typical, dB	21	21	21	21
Isolation, minimum, dB	50	50	50	50
Input Power, RMS, maximum, W	200	200	200	200
Input Power, PEP, maximum, W	2000	2000	2000	2000
3rd Order PIM, minimum, dBc	-155	-155	-155	
3rd Order PIM Test Method	2 x 20 W CW tones	2 x 20 W CW tones	2 x 20 W CW tones	
Higher Order PIM, minimum, dBc				-155
Higher Order PIM Test Method				2 x 20 W CW tones

## Block Diagram

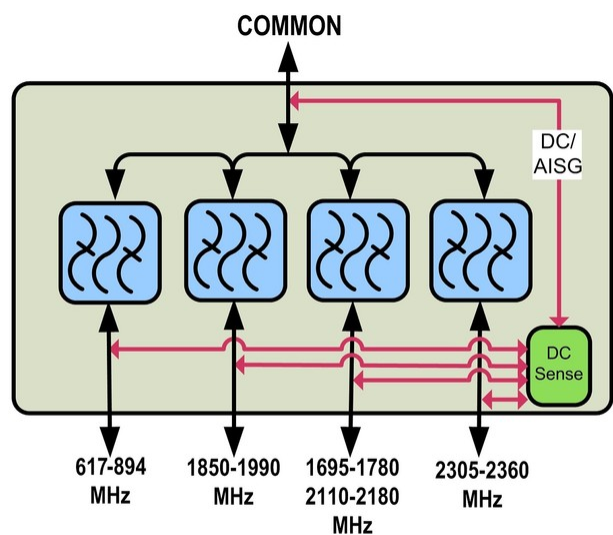

Logic Table

Combining Mode Operation (Bottom)					DC/AISG PORT Priority
PORT 1 617-894	PORT 2 1850-1990	PORT 3 1695-1780/2110-2180	PORT 4 2305-2360	COMMON	
RF Ports DC Voltage Input					
Any*	Any*	7 ≤ V ≤ 30	Any*	<7	
DC/AISG Path Selection					
617-894 MHz "OFF" 1850-1990 MHz "OFF" 1695-1780/2110-2180 MHz to COMMON "ON" 2305-2360 MHz "OFF"					
7 ≤ V ≤ 30	Any*	<7	Any*	<7	PORT 3 [Highest] PORT 1 PORT 2 PORT 4 [Lowest]
617-894 MHz to COMMON "ON" 1850-1990 MHz "OFF" 1695-1780/2110-2180 MHz "OFF" 2305-2360 MHz "OFF"					
<7	7 ≤ V ≤ 30	<7	Any*	<7	
617-894 MHz "OFF" 1850-1990MHz "ON" 1695-1780/2110-2180 MHz "OFF" 2305-2360 MHz to COMMON "OFF"					
<7	<7	<7	7 ≤ V ≤ 30	<7	
617-894 MHz "OFF" 1850-1990 MHz to COMMON "OFF" 1695-1780/2110-2180 MHz "OFF" 2305-2360 MHz "ON"					
<7	<7	<7	<7	<7	
ALL PORTS OFF					

\* Any DC voltage applied in the ON (7-30V) or OFF (<7V) ranges  
Note: When two or more DC/AISG signals are available, port with higher priority is bypassed to common

Splitting Mode Operation (Tower Top)					DC/AISG Path Selection
RF Ports Impedance DC (Load Sense)					
PORT 1 617-894	PORT 2 1850-1990	PORT 3 1695-1780/2110-2180	PORT 4 2305-2360	COMMON	
Short	Short	Short	Short	7 ≤ V ≤ 30	
Open/ Load	Open/ Load	Open/ Load	Open/ Load	7 ≤ V ≤ 30	ALL PORTS ON
One or more port(s) are Open/ Load					DC/AISG will be passed to ALL Open/Load port(s)

Note: In this mode DC/AISG will be passed to all detected ports and blocked at shorted ones

Mechanical Specifications

Wind Loading @ Velocity, frontal	58.0 N @ 150 km/h (13.0 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	9.0 N @ 150 km/h (2.0 lbf @ 150 km/h)

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
-----------------------	--------------------------------------

# CQX6192123-DS-43 | E12F23P03

---

<b>Corrosion Test Method</b>	IEC 60068-2-11, 30 days
<b>Ingress Protection Test Method</b>	IEC 60529:2001, IP67

## Packaging and Weights

<b>Included</b>	Mounting hardware
<b>Volume</b>	2.8 L
<b>Weight, without mounting hardware</b>	4 kg   8.818 lb