# 760249060 | OTE-04MX-14-EXTG03-U23



Mini-OTE 300-Series, Optical Terminal Enclosure, 4-port mini-size DLX connector, with 1x4 splitter, black, with grounding, external mounting. Splitter outputs connected to terminal housing ports, maximum 26 splices.

- Hardened connectors are factory-integrated and environmentally sealed for use in optical drop cable deployments
- Plug and play adapter ports ensure rapid cable installment in the outside plant access section of the network
- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Accommodates CommScope's field installable splitters and compact CWDMs

#### Product Classification

Regional Availability	Asia   EMEA   Latin America   North America
Product Type	Access terminal, with splitter
Product Series	Mini-OTE 300

### General Specifications

Application	For central core tube ribbon shielded/unshielded fiber cable   For flat drop with/without trace wire fiber cable   For loose buffer tube standard (72 F) and micro (144 F) fiber cable   For round armored up to 0.50 in/12.7 mm diameter fiber cable
Cable Type	No cable (stubless)
Distribution Type	1 x 4 splitter
Port Type	Hardened mini-size DLX
Port, quantity	4
Dimensions	
Height	342.9 mm   13.5 in
Width	182.88 mm   7.2 in
Depth	121.92 mm   4.8 in
Cable Stub Length	
Cable Stub Length	0 m   0 ft


### Dimension Drawing

Page 1 of 3


©2023 CommScope, Inc. All rights reserved. All trademarks identified by ® or <sup>™</sup> are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 22, 2023



# 760249060 | OTE-04MX-14-EXTG03-U23

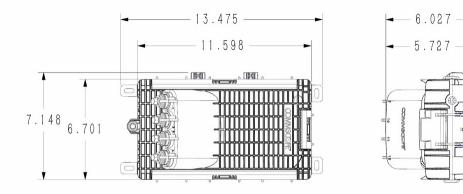

## Ordering Tree

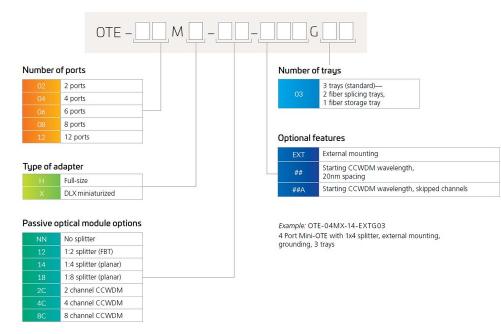

## Optical Specifications

Operating Wavelength Range

1260 – 1635 nm

#### **Environmental Specifications**

Operating Temperature Relative Humidity -40 °C to +60 °C (-40 °F to +140 °F)

5%–100%, condensing

Page 2 of 3

©2023 CommScope, Inc. All rights reserved. All trademarks identified by ® or <sup>™</sup> are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 22, 2023



# 760249060 | OTE-04MX-14-EXTG03-U23

Environmental Space	Above ground   Below ground   Buried
Qualification Standard Note	See test report CTR-1016 for details and exceptions
Qualification Standards	IEC 60529, IP68 + 2 m waterhead   Telcordia GR-771-CORE
UV Resistance	UV stabilized

### Regulatory Compliance/Certifications

#### Agency

#### Classification

ISO 9001:2015 **REACH-SVHC** 

Designed, manufactured and/or distributed under this quality management system Compliant as per SVHC revision on www.commscope.com/ProductCompliance



### Included Products

OTE-M-CABLERET-KIT - Mini-OTE 300-Series, Optical Terminal Pole Cable Retention Kit

Page 3 of 3

©2023 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: February 22, 2023

