


**SA-1C**


**Snap-in Hanger Adapter**

Bulletin 7824041 Rev. A | Page 1 of 1

*CommScope Infrastructure Academy offers installation training.*




3/4" hole for mounting snap-in hangers




Slots for nylon cable ties and banding up to 1/2" wide

**1**

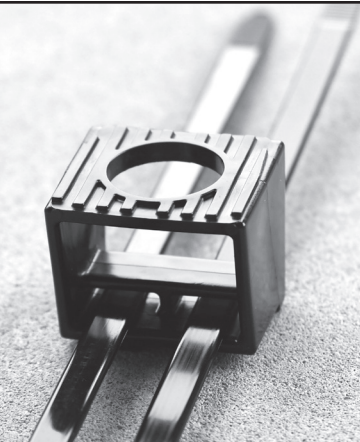


Insert a cable tie through each slot


**2**



Tighten the snap-in hanger adapter to the round tower member with two nylon cable ties or two wraps of outdoor rated cable banding. Cut off and discard remaining tail.

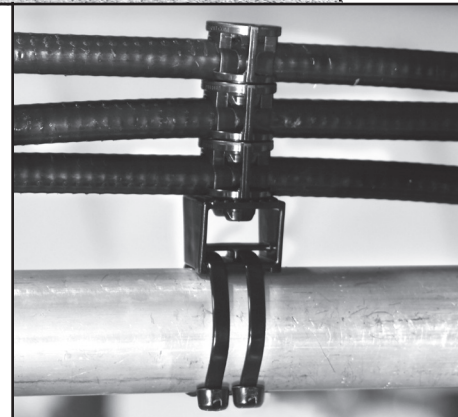

Configuration showing snap-in adapter securely attached to tower member to support up to 3 SnapTak® hangers

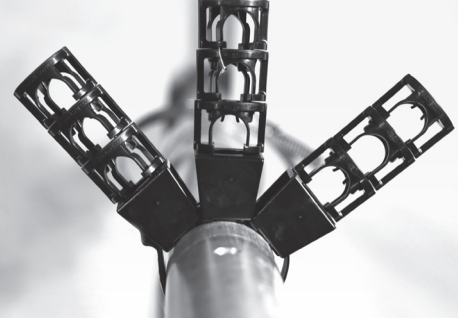

Maximum 3 snap-in adapters per two nylon cable ties.  
Maximum 3 SnapTak® hangers per snap-in adapter

Additional CommScope Materials	
Part Number	Description
CT-460-100	Cable tie, weather resistant, 460 mm length, 100 pcs
CB-12-50	Cable banding, bulk, 1/2 inch X 50 foot reel
CB-LH-25	Locking heads for cable banding number CB-12-50, 25 pcs
CB-IT	Installation tool for cable banding CB-12-50

**CommScope**

1100 CommScope Place SE P.O. Box 339, Hickory, NC 28603-0339  
(828) 324-2200 (800) 982-1708  
www.commscope.com

**Customer Service 24 hours**

North America: +1-800-255-1479 (toll free)  
Any country: +1-779-435-6500  
email: acicustomersupportcenter@commscope.com

Notice: CommScope disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.  
Aviso: CommScope no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.  
Avis : CommScope décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.  
Hinweis: CommScope lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.  
Atenção: A CommScope abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.  
Avvertenza: CommScope declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.  
注意: CommScope 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負任何義務和責任

