HX12-7W

Base Product



3.6m | 12ft ValuLine® High Performance, High XPD Antenna, dualpolarized, 7.125 – 8.500 GHz

Product Classification

Product Type	Microwave antenna
General Specifications	
Antenna Type	HX - ValuLine® High Performance, High XPD Antenna, dual-polarized
Polarization	Dual
Side Struts, Included	2
Side Struts, Optional	3
Dimensions	
Diameter, nominal	3.6 m 12 ft
Electrical Specifications	
Operating Frequency Band	7.125 – 8.500 GHz
Gain, Low Band	46 dBi
Gain, Mid Band	46.8 dBi
Gain, Top Band	47.6 dBi
Boresite Cross Polarization Discrimination (XPD)	33 dB
Front-to-Back Ratio	75 dB
Beamwidth, Horizontal	° 8.0
Beamwidth, Vertical	° 8.0
Return Loss	26 dB
VSWR	1.1
Radiation Pattern Envelope Reference (RPE)	7430
Electrical Compliance	ACMA FX03_7p5a ETSI 302 217 Class 3
Cross Polarization Discrimination (XPD) Electrical Compliance	ETSI EN 302217 XPD Category 2

Page 1 of 7



HX12-7W

Mechanical Specifications

Compatible Mounting Pipe Diameter	115 mm 4.5 in
Fine Azimuth Adjustment Range	±5°
Fine Elevation Adjustment Range	±5°
Wind Speed, operational	201 km/h 124.896 mph
Wind Speed, survival	200 km/h 124.274 mph

Page 2 of 7



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

HX12-7W

Antenna Dimensions and Mounting Information

HX/USX12 ç iches Antenna size, ft (m) в с А D Е F 8.5 (216) 28.2 (715) 149.3 46.3 (3793) (1177) 81.5 (2069) 10.6 (269)

Wind Forces at Wind Velocity Survival Rating

12 (3.6)

Axial Force (FA)	26750 N 6,013.641 lbf
Angle α for MT Max	-120 °
Side Force (FS)	9450 N 2,124.445 lbf
Twisting Moment (MT)	-17550 N-m -155,330.59
Force on Inboard Strut Side	13000 N 2,922.517 lbf
Force on Outboard Strut Side	4500 N 1,011.64 lbf
Zcg without Ice	680 mm 26.772 in
Zcg with 1/2 in (12 mm) Radial Ice	841 mm 33.11 in

.594 in lb of

Page 3 of 7



HX12-7W

Weight with 1/2 in (12 mm) Radial Ice

643 kg | 1,417.571 lb


Page 4 of 7



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

HX12-7W

Wind Forces at Wind Velocity Survival Rating Image

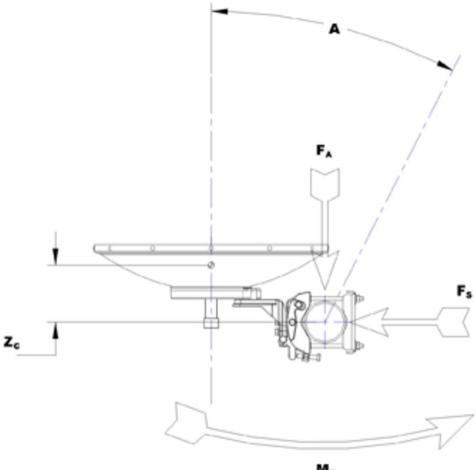

MT

Packaging and Weights

Weight, net

348 kg | 767.208 lb

Regulatory Compliance/Certifications

Classification

Agency

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

* Footnotes

Operating Frequency Band

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.

Page 5 of 7



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners.

HX12-7W

Gain, Mid Band For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns. Boresite Cross Polarization Discrimination (XPD) The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. **Front-to-Back Ratio** Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise. **Return Loss** The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted. **VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band. Radiation Pattern Envelope Reference (RPE) Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees. Wind Speed, survival The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice. Axial Force (FA) Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. Maximum side force exerted on the mounting pipe as a Side Force (FS) result of wind from the most critical direction for this

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

Page 6 of 7



Twisting Moment (MT)

parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025