

2.4m | 8ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 10.000 – 11.700 GHz, CPR090G flange

Product Classification			
Product Type	Microwave antenna		
Product Brand	Sentinel®		
General Specifications			
Antenna Type	USX - Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized		
Polarization	Dual		
Antenna Input	CPR90G		
Antenna Color	Gray		
Reflector Construction	One-piece reflector		
lome Color Gray			
Radome Material Fabric			
Flash Included	Yes		
Side Struts, Included	1		
Side Struts, Optional	4		
Dimensions			
Diameter, nominal	2.4 m 8 ft		
Electrical Specifications			
Operating Frequency Band	10.000 – 11.700 GHz		
Gain, Low Band	45.4 dBi		
Gain, Mid Band	46 dBi		
in, Top Band 46.6 dBi			
Boresite Cross Polarization Discrimination (XPD)	40 dB		
Front-to-Back Ratio	80 dB		
Beamwidth, Horizontal	0.9 °		

Page 1 of 7




Beamwidth, Vertical	0.9 °
Return Loss	26 dB
VSWR	1.1
Radiation Pattern Envelope Reference (RPE)	7398
Electrical Compliance	ACMA FX03_10a ACMA FX03_11a ETSI 302 217 Class 4 US FCC Part 105A US FCC Part 107A
Cross Polarization Discrimination (XPD) Electrical Compliance	ETSI EN 302217 XPD Category 3
Mechanical Specifications	
Compatible Mounting Pipe Diameter	115 mm 4.5 in
Fine Azimuth Adjustment Range	±5°
Fine Elevation Adjustment Range	±5°
Wind Speed, operational	180 km/h 111.847 mph
Wind Speed, survival	200 km/h 124.274 mph



Antenna Dimensions and Mounting Information

USX8

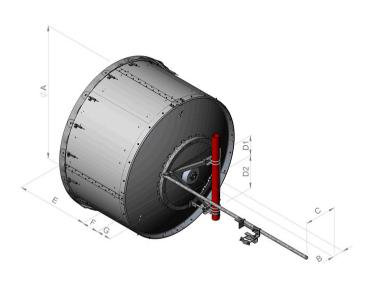

		Dime	nsions ir	inches	(mm)			1
Antenna size, ft (m)	A	в	с	D1	D2	Е	F	G
8 (2.4)	95.1 (2416)	8.0 (203)	22.5 (572)	14.1 (357)	23.6 (600)	51.1 (1298)	12.1 (306)	10.3 (262)

Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)	10599 N 2,382.751 lbf
Angle α for MT Max	-140 °
Side Force (FS)	6268 N 1,409.103 lbf
Twisting Moment (MT)	-7647 N-m -67,681.656 in lb
Force on Inboard Strut Side	11263 N 2,532.024 lbf
Zcg without Ice	624 mm 24.567 in
Zcg with 1/2 in (12 mm) Radial Ice	765 mm 30.118 in
Weight with 1/2 in (12 mm) Radial Ice	364 kg 802.482 lb


Page 3 of 7



Page 4 of 7



Wind Forces at Wind Velocity Survival Rating Image

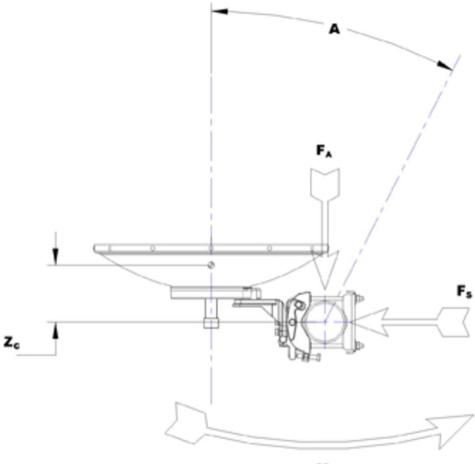

M_T

Packaging and Weights Height, packed 2250 mm | 88.583 in Width, packed Length, packed Packaging Type Ś Volume e Weight, gross Weight, net

Regulatory Compliance/Certifications

1130 mm 44.488 in		
2380 mm 93.701 in		
Standard pack		
6.1 m³ 215.42 ft³		
329 kg 725.32 lb		
196 kg 432.106 lb		

Page 5 of 7



Agency

Classification

rigeney	olacomoulon		
CHINA-ROHS	Above maximum concentration value		
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system		
ROHS	Compliant/Exempted		
UK-ROHS	Compliant/Exempted		
* Footnotes			
Operating Frequency Ba	nd	Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.	
Gain, Mid Band		For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.	
Boresite Cross Polarizat	tion Discrimination (XPD)	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.	
Front-to-Back Ratio		Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.	
Return Loss		The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.	
VSWR		Maximum; is the guaranteed Peak Voltage-Standing-Wave- Ratio within the operating band.	
Radiation Pattern Envelo	ope Reference (RPE)	Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout	
Cross Polarization Discr	imination (XPD) Electrical Compliance	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.	
Wind Speed, operational	I	For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees.	

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

Page 6 of 7



Wind Speed, survival	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.
Axial Force (FA)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Packaging Type	Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wire- bound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.

