

24-port sector antenna, 2x 694-862 (R1), 2x 880-960 (R2), 2x 694-960 (R3), 8x 1695-2690 (Y1-Y2/Y4-Y5) & 2x 1427-2690 (Y3) MHz, 65° HPBW and 8x 3300-3800 (P1) MHz, 90° HPBW, 9x RET.

- Includes 1x 4-Column Array for 3300-3800MHz and calibration port. Column spacing optimized to support Soft Split Beamforming
- Retractable tilt indicator rods
- S4 array uses MQ cluster connectors
- Includes nine internal RET's
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- Antenna shape optimized for wind load reduction

This product will be discontinued on: December 31, 2025

General Specifications

Antenna Type	Sector and beamforming
Band	Multiband
Calibration Connector Interface	MQ5
Calibration Connector Quantity	1
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female MQ4 MQ5
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	10
RF Connector Quantity, low band	6
RF Connector Quantity, total	24

Remote Electrical Tilt (RET) Information

Page 1 of 8




RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10-30 Vdc
Internal RET	High band (1) Low band (3) Mid band (5)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)
Dimensions	
Width	430 mm 16.929 in
Depth	197 mm 7.756 in

 Length
 2769 mm | 109.016 in

 Net Weight, antenna only
 59 kg | 130.073 lb

 TDD Column Spacing
 42 mm | 1.654 in

Array Layout




	Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
	R1	694-862	1 - 2	1	AISG1	CPxxxxxxxxxxxxxR1
	R2	880-960	3 - 4	2	AISG1	CPxxxxxxxxxxxxxxR2
	R3	694-960	5 - 6	3	AISG1	CPxxxxxxxxxxxxxxR3
5	Y1	1695-2690	7 - 8	4	AISG1	CPxxxxxxxxxxxxxXXXXY1
,	Y2	1695-2690	9 - 10	5	AISG1	CPxxxxxxxxxxxxxXX2
	Y3	1427-2690	11 - 12	6	AISG1	CPxxxxxxxxxxxxxXXXXXXXXXXXXXXXXXXXXXXXX
	¥4	1695-2690	13 - 14	7	AISG1	CPxxxxxxxxxxxxXXXY4
	Y5	1695-2690	15 - 16	8	AISG1	CPxxxxxxxxxxxxxXY5
4	P1	3300-3800	17 - 24	9	AISG1	CPxxxxxxxxxxxxxxP1

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

Page 2 of 8



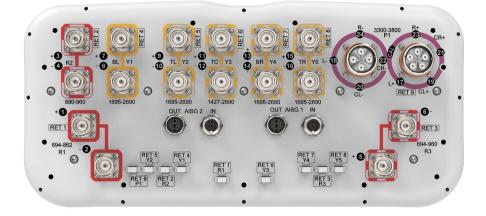

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2690 MHz 3300 – 3800 MHz 694 – 862 MHz 694 – 960 MHz 880 – 960 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

	R1	R2	R3	Y1-Y2/Y4-Y	5Y1-Y2/Y4-Y	5Y3	Y3	Y3	P1
Frequency Band, MHz	694-862	880-960	694-960	1695-2200	2300-2690	1427-151	81695-218	02300-269	03300-3800
RF Port	1,2	3,4	5,6	7-10,13-16	7-10,13-16	11,12	11,12	11,12	17-24
Gain, dBi	15.8	16.3	16.4	17.4	18	16.4	17.7	18.2	16
Beamwidth, Horizontal, degrees	60	54	58	60	59	58	56	63	83
Beamwidth, Vertical, degrees	7.4	6.4	7	6.2	5	7.2	5.6	4.3	6.2
Beam Tilt, degrees	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	16	17	15	15	16	23	20	20	16
Front-to-Back Ratio at 180°, dB	34	31	31	32	32	33	31	32	29

Coupling level, Amp,



26

Antenna port to Cal port, dB									
Coupling level, max Amp Δ, Antenna port to Cal port, dB									±2
Coupler, max Amp ∆, Antenna port to Cal port, dB									0.9
Coupler, max Phase Δ, Antenna port to Cal port, degrees									7
Isolation, Cross Polarization, dB	27	27	27	27	27	26	26	26	25
Isolation, Inter-band, dB	27	27	27	27	27	27	27	27	25
Isolation, Co-polarization, dB									20
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153	-153	-130
Input Power per Port at 50°C, maximum, watts	300	300	300	250	200	250	250	200	75

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3300-3800
Gain, dBi	17.9
Beamwidth, Horizontal, degrees	65
Beamwidth, Vertical, degrees	6.2
Front-to-Back Total Power at 180° ± 30°, dB	25
USLS (First Lobe), dB	20

Electrical Specifications, Service Beam

Frequency Band, MHz	3300-3800
Steered 0° Gain, dBi	20.8
Steered 0° Beamwidth, Horizontal, degrees	24
Steered 0° Front-to-Back Total Power at 180° ±	30

30°, dB

Page 4 of 8



Steered 0° Horizontal Sidelobe, dB	15
Steered 30° Gain, dBi	19.5
Steered 30° Beamwidth, Horizontal, degrees	28
Steered 30° Front-to- Back Total Power at 180°	27

± 30°, dB

Electrical Specifications, Soft Split

Frequency Band, MHz	3300-3800
Gain, dBi	19.5
Beamwidth, Horizontal, degrees	31
Front-to-Back Total Power at 180° ± 30°, dB	29
Horizontal Sidelobe, dB	17

Mechanical Specifications

Wind Loading @ Velocity, frontal	651.0 N @ 150 km/h (146.4 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	351.0 N @ 150 km/h (78.9 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,028.0 N @ 150 km/h (231.1 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	421.0 N @ 150 km/h (94.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	530 mm 20.866 in
Depth, packed	356 mm 14.016 in
Length, packed	2897 mm 114.055 in
Weight, gross	80 kg 176.37 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant

Page 5 of 8





Compliant

Included Products

BSAMNT-4	 Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
BSAMNT-M4	 Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.
* Footnotes	

Performance Note Severe environmental conditions may degrade optimum performance

Page 6 of 8



BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification		
Product Type	Downtilt mounting kit	
General Specifications		
Application	Outdoor	
Color	Silver	
Dimensions		
Compatible Diameter, maximum	115 mm 4.528 in	
Compatible Diameter, minimum	60 mm 2.362 in	
Weight, net	6.5 kg 14.33 lb	
Material Specifications		
Material Type	Galvanized steel	
Packaging and Weights		
Included	Brackets Hardware	
Packaging quantity	1	
Regulatory Compliance/Certifications		

Agency	Classification	
CHINA-ROHS	Below maximum concentration value	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system	
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance	
ROHS	Compliant	
UK-ROHS	Compliant	



Page 7 of 8



BSAMNT-M4



Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

Product Classification		
Product Type	Downtilt mounting kit	
General Specifications		
Application	Outdoor	
Color	Silver	
Dimensions		
Compatible Diameter, maximum	115 mm 4.528 in	
Compatible Diameter, minimum	60 mm 2.362 in	
Weight, net	4.6 kg 10.141 lb	
Material Specifications		
Material Type	Galvanized steel	
Packaging and Weights		
Included	Brackets Hardware	
Packaging quantity	1	
Dogulatory Compliance/Cortifications		

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant
REACH-SVHC ROHS	Compliant as per SVHC revision on www.andrew.com/ProductCompliance Compliant



Page 8 of 8

