

Twin Diplexer, 380-960 MHz/1695-2690 MHz,dc Sense,4.3-10

- BTS-to-feeder and feeder-to-antenna application
- New 4.3-10 connectors for improved PIM performance and size reduction
- Automatic dc switching with dc sense
- Convertible mounting brackets

Product Classification

Product Type Diplexer

General Specifications

Product Family CBC426
Color Gray
Common Port Label ANT

Modularity 2-Twin

MountingPole | WallMounting Pipe HardwareBand clamps (2)RF Connector Interface4.3-10 FemaleRF Connector Interface Body StyleLong neck

Dimensions

 Height
 152 mm | 5.984 in

 Width
 121 mm | 4.764 in


 Depth
 87 mm | 3.425 in


 Ground Screw Diameter
 6 mm | 0.236 in


 Mounting Pipe Diameter Range
 40-160 mm




Outline Drawing









Electrical Specifications

Impedance 50 ohm

License Band, Band Pass APT 700 | AWS 1700 | CEL 850 | CEL 900 | DCS 1800 | EDD 800 | IMT

2100 | IMT 2600 | LMR 750 | LMR 800 | LMR 900 | PCS 1900 | TDD 1900 | TDD 2000 | TDD 2300 | TDD 2600 | USA 600 | USA 700 | USA 750

Electrical Specifications, Common Port

Composite Power, RMS 250 W

Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through MethodAuto sensingdc/AISG Pass-through PathSee logic table

ANDDEW

an Amphenol company

Lightning Surge Current 10 kA

Lightning Surge Current Waveform 8/20 waveform

Voltage 7–30 Vdc

Electrical Specifications, AISG

AISG Carrier 2176 KHz ± 100 ppm

Insertion Loss, maximum1 dBReturn Loss, minimum15 dB

Electrical Specifications

Sub-module	1 2	1 2
Branch	1	2
Port Designation	380-960	1695-2690
License Band	LMR 750, Band Pass LMR 800, Band Pass USA 700, Band Pass USA 750, Band Pass USA 600, Band Pass	PCS 1900, Band Pass WCS 2300, Band Pass AWS 1700, Band Pass TDD 2600, Band Pass


CEL 850, Band Pass

Electrical Specifications, Band Pass

Frequency Range, MHz	380-960	1695-2690
Insertion Loss, typical, dB	0.1	0.1
Total Group Delay, typical, ns	2	4
Return Loss, typical, dB	24	22
Isolation, typical, dB	65	63
Input Power, RMS, maximum, W	200	200
Input Power, PEP, maximum, W	2000	2000
3rd Order PIM, minimum, dBc	-161	-161
3rd Order PIM Test Method	2 x 20 W CW tones	2 x 20 W CW tones

Block Diagram



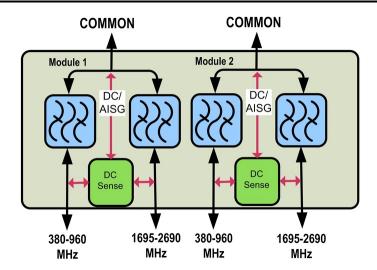

Logic Table

Combining Mode Operation (Ground Based)		round Based)	
RF Ports Input DC Voltage		tage	
380 to 960 MHz	1695 to 2690 MHz	COMMON	DC/AISG Path Selection
7 ≤ V ≤ 30	<7	<7	380 to 960 MHz to COMMON "ON"
<7	7 ≤ V ≤ 30	<7	1695 to 2690 MHz to COMMON "ON"
7 ≤ V ≤ 30	7 ≤ V ≤ 30	<7	1695 to 2690 MHz to COMMON "ON"

Splitting Mode Operation (Tower Top)		ower Top)	
RF Ports Impedance DC (Load sensing)		ad sensing)	
380 to 960 MHz	1695 to 2690 MHz	COMMON	DC/AISG Path Selection
open/load	short	7 ≤ V ≤ 30	COMMON to 380-960 "ON"
short	open/load	7 ≤ V ≤ 30	COMMON to 1695-2690 "ON"
open/load	open/load	7 ≤ V ≤ 30	ALL ports ON
short	short	7 ≤ V ≤ 30	ALL ports OFF

Environmental Specifications

Operating Temperature $-40 \,^{\circ}\text{C} \text{ to } +65 \,^{\circ}\text{C} \, (-40 \,^{\circ}\text{F to } +149 \,^{\circ}\text{F})$

Relative Humidity 5%-100%

Corrosion Test Method IEC 60068-2-11, 30 days

Ingress Protection Test Method IEC 60529:2001, IP67

Packaging and Weights

IncludedMounting hardwareMounting Hardware Weight0.6 kg | 1.323 lb

Volume 1.6 L

Weight, without mounting hardware 2.7 kg | 5.952 lb

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



