

0.9m | 3ft Sentinel® High Performance Antenna, single-polarized, 10.125 - 11.700 GHz, CPR-G Flange, White Antenna, Grey Radome

Product Classification

Product Type Microwave antenna

Product Brand Sentinel®

General Specifications

Antenna Type SHP - Sentinel® High Performance Antenna, single-

polarized

PolarizationSingleAntenna InputCPR90GAntenna ColorWhite

Reflector Construction One-piece reflector

Radome Color Gray

Radome Material Composite Broadband

Flash Included No
Side Struts, Included 0
Side Struts, Optional 1

Dimensions

Diameter, nominal 0.9 m | 3 ft

Electrical Specifications

Operating Frequency Band 10.125 - 11.700 GHz

Gain, Low Band37.2 dBiGain, Mid Band38.4 dBiGain, Top Band39 dBiBoresite Cross Polarization Discrimination (XPD)30 dBFront-to-Back Ratio69 dB

Beamwidth, Horizontal $$2\,^{\circ}$$



Page 1 of 6

Return Loss 17.7 dB

VSWR 1.3

Radiation Pattern Envelope Reference (RPE) 7291B | 7293B

Electrical Compliance Brazil Anatel Class 2 | Canada SRSP

310.5 | ETSI 302 217 Class 3 | US FCC Part

101A

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 3

Mechanical Specifications

Compatible Mounting Pipe Diameter 90 mm – 120 mm | 3.5 in – 4.7 in


Fine Azimuth Adjustment Range ±15°

Fine Elevation Adjustment Range ±15°

Wind Speed, operational 180 km/h | 111.847 mph

Wind Speed, survival 250 km/h | 155.343 mph

Antenna Dimensions and Mounting Information

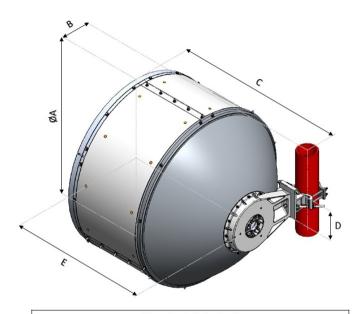

Dimensions in inches (mm)					
Antenna Size, ft (m)	А	В	С	D	Е
3 (0.9)	38.9 (987)	16 (407)	33.7 (855)	7.2 (183)	34.9 (887)

Wind Forces at Wind Velocity Survival Rating



Side Force (FS)

Axial Force (FA) 3353 N | 753.785 lbf

Angle α for MT Max

Twisting Moment (MT) 1203 N-m | 10,647.447 in lb


1680 N | 377.679 lbf

Zcg without Ice 325 mm | 12.795 in

Zcg with 1/2 in (12 mm) Radial Ice 481 mm | 18.937 in

Weight with 1/2 in (12 mm) Radial Ice 89 kg | 196.211 lb

Wind Forces at Wind Velocity Survival Rating Image

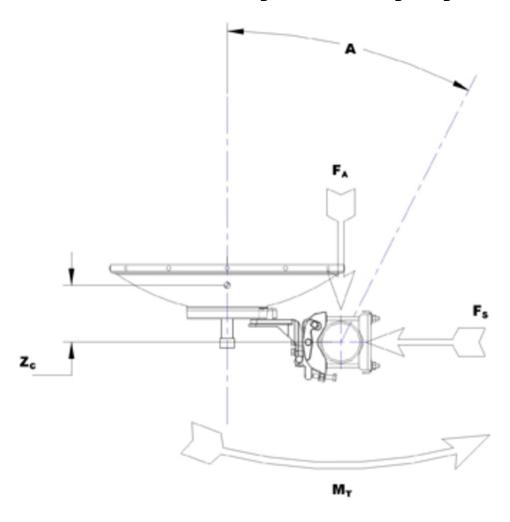

Packaging and Weights

Height, packed

Width, packed

Length, packed

Packaging Type

Volume

Weight, gross

Weight, net

Regulatory Compliance/Certifications

1220 mm | 48.032 in

470 mm | 18.504 in

1120 mm | 44.095 in

Standard pack

0.64 m³ | 22.601 ft³

40 kg | 88.185 lb

27 kg | 59.525 lb



Agency

Classification

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

* Footnotes

Operating Frequency Band

Bands correspond with CCIR recommendations or common

allocations used throughout the world. Other ranges can be

accommodated on special order.

Gain, Mid Band For a given frequency band, gain is primarily a function of

antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

Boresite Cross Polarization Discrimination (XPD)

The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Front-to-Back Ratio Denotes highest radiation relative to the main beam, at 180°

 $\pm 40^{\circ}$, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

Return LossThe figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

VSWR Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

Radiation Pattern Envelope Reference (RPE)

Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Wind Speed, operational For VHLP(X), SHP(X), HX and USX antennas, the wind speed

where the maximum antenna deflection is $0.3\,\mathrm{x}$ the $3\,\mathrm{dB}$ beam width of the antenna. For other antennas, it is defined

as a deflection is equal to or less than 0.1 degrees.

Wind Speed, survival

The maximum wind speed the antenna, including mounts

and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified

amount of radial ice.

ANDREW® an Amphenol company

Axial Force (FA)

Side Force (FS)

Twisting Moment (MT)

Packaging Type

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wirebound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.