

### 2X Triplexer 1710-1880/1920-2170/2300-2690, DC Smart Bypass, 4.3-10 connectors

- Industry leading PIM performance
- Twin configuration
- Designed for network Modernization, introduction of LTE1800 on existing site
- Designed for network Modernization, introduction of LTE2600 on existing site
- New 4.3-10 connectors for improved PIM performance and size reduction

#### Product Classification

Product Type	Triplexer	
General Specifications		
Product Family	CBC182126	
Color	Gray	
Common Port Label	COMM	
Modularity	2-Twin	
Mounting	Pole   Wall	
Mounting Pipe Hardware	Band clamps (2)	
RF Connector Interface	4.3-10 Female	
RF Connector Interface Body Style	Medium neck	
Dimensions		
Height	182.5 mm   7.18	


Height	182.5 mm   7.185 in	
Width	156 mm   6.142 in	
Depth	173.5 mm   6.831 in	
Mounting Pipe Diameter Range	42.6-122 mm	

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

Page 1 of 4

# E14F10P17

# Outline Drawing

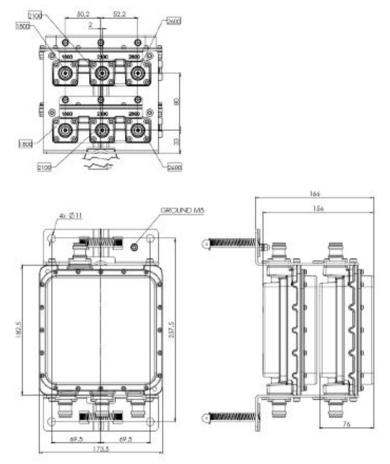

# Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	DCS 1800   IMT 2100   IMT 2600

# Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through, combiner	Autosensing
dc/AISG Pass-through, demultiplexer	Autosensing
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

# E14F10P17


# Electrical Specifications

Sub-module	1   2	1 2	1 2
Branch	1	2	3
Port Designation	1800	2100	2600
License Band	DCS 1800, Band Pass	IMT 2100, Band Pass	IMT 2600, Band Pass

### Electrical Specifications, Band Pass

Frequency Range, MHz	1710-1880	1920-2170	2300-2690
Insertion Loss, typical, dB	0.25	0.25	0.2
Return Loss, minimum, dB	18	18	18
Return Loss, typical, dB	20	20	20
Isolation, minimum, dB	50	50	50
Input Power, RMS, maximum, W	300	300	300
3rd Order PIM, typical, dBc	-160	-160	-160
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

### Block Diagram

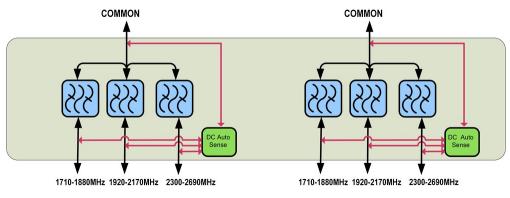

# Environmental Specifications

Operating Temperature
Relative Humidity
Corrosion Test Method
Ingress Protection Test Method

-40 °C to +60 °C (-40 °F to +140 °F) Up to 100% IEC 60068-2-11, 30 days IEC 60529:2001, IP67

# Packaging and Weights

Included

Mounting hardware

ANDREW an Amphenol company

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

Page 3 of 4

# E14F10P17

#### Volume

5 L

Weight, net

. . .

6 kg | 13.228 lb

# Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

Page 4 of 4



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025