

#### 4-port sector antenna, 4x 3100-4200 MHz, 65°HPBW

- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector
- Manual tilt adjustment with tilt indicators. RET compatible by replacing the manual tilt cartridge ٠ on site with the "plug-in" RET
- Conforms to RoHS 2011/65/EU
- The antenna is supplied with mounting kits that provide 0 degree of mechanical downtilt; optional downtilt mounting kits are available

This product will be discontinued on: December 31, 2025 **Replaced By:** SS-65M-R2

4-port sector antenna, 4x 3100-4200 MHz, 65°HPBW , 2x RET

### General Specifications

Antenna Type	Sector
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	PVC, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	4
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	0
RF Connector Quantity, total	4

### Remote Electrical Tilt (RET) Information

RET Interface	8-pin DIN Female   8-pin DIN Male
Input Voltage	10-30 Vdc

Page 1 of 6



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 6, 2025

## SS-65M-M

Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0
Dimensions	
Width	170 mm   6.693 in
Depth	105 mm   4.134 in
Length	998 mm   39.291 in
Net Weight, without mounting kit	6.2 kg   13.669 lb

### Array Layout


Array ID Frequency (MHz)	RF Connector	RET (N/A)	AISG RET UID
P1 3100-4200	1 - 2	N1/A	N//A
P2 3100-4200	3 - 4	N/A	N/A

## Port Configuration

P1



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 6, 2025

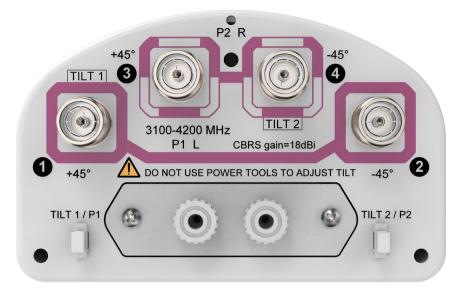

## **Electrical Specifications**

Impedance	50 ohm
Operating Frequency Band	3100 - 4200 MHz
Polarization	±45°
Total Input Power, maximum	500 W

## **Electrical Specifications**

Frequency Band, MHz	3100-3550	3550-3700	3700-4200
Gain, dBi	18	18.3	18.2
Beamwidth, Horizontal, degrees	69	67	64
Beamwidth, Vertical, degrees	5.6	5.2	5.1
Beam Tilt, degrees	0-10	0-10	0-10
USLS (First Lobe), dB	22	23	20
Front-to-Back Ratio, Copolarization 180° ± 30°, dB	26	27	27
Isolation, Cross Polarization, dB	28	28	28
Isolation, Inter-band, dB	28	28	28
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150

Page 3 of 6



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 6, 2025

## SS-65M-M

Input Power per Port, maximum, watts	200	200	200
Mechanical Specifications			
Wind Loading @ Velocity, frontal	163.0 N @ 150 km/h (3	86.6 lbf @ 150 km/h)	
Wind Loading @ Velocity, lateral	124.0 N @ 150 km/h (2	27.9 lbf @ 150 km/h)	
Wind Loading @ Velocity, rear	271.0 N @ 150 km/h (6	0.9 lbf @ 150 km/h)	
Wind Speed, maximum	241 km/h (150 mph)		

## Packaging and Weights

Width, packed	275 mm   10.827 in
Depth, packed	218 mm   8.583 in
Length, packed	1117 mm   43.976 in
Weight, gross	11.3 kg   24.912 lb

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

### Included Products

DB390

Pipe Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Use for narrow panel antennas. Includes two pipe mounts.

### \* Footnotes

**Performance Note** 

Severe environmental conditions may degrade optimum performance



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 6, 2025

Page 4 of 6

# DB390



Pipe Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Use for narrow panel antennas. Includes two pipe mounts.

Pipe mounting kit
Outdoor
Silver
114.3 mm   4.5 in
61 mm   2.402 in
2 kg   4.409 lb
Galvanized steel

Included	Brackets   Hardware
Packaging quantity	1
Weight, gross	2.1 kg   4.63 lb

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Page 5 of 6



Page 6 of 6



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 2, 2025