

10-port sector antenna, 2x 698–896, 4x 1695–2200 and 4x 3550-3700 MHz, 65° HPBW, 2x RETs and 2x SBTs

- Perfect antenna to add 3.5GHz CBRS to macro sites
- Low band and mid band performance mirrors the performance of existing NHH hex port antennas
- Interleaved dipole technology providing for attractive, low wind load mechanical package
- Internal SBT on low and mid band allow remote RET control from the radio over the RF jumper cable
- One LB RET and one MB RET, both Mid bands are controlled by one RET to ensure same tilt level for 4x MIMO

## General Specifications

Antenna Type Sector

Band Multiband

Color Light Gray (RAL 7035)

**Grounding Type**RF connector inner conductor and body grounded to reflector and mounting

bracket

Performance Note Outdoor usage

Radome MaterialFiberglass, UV resistantRadiator MaterialLow loss circuit board

Reflector Material Aluminum

**RF Connector Interface** 4.3-10 Female

**RF Connector Location** Bottom

RF Connector Quantity, high band 4
RF Connector Quantity, mid band 4
RF Connector Quantity, low band 2
RF Connector Quantity, total 10

#### Remote Electrical Tilt (RET) Information

**RET Hardware** CommRET v2

**RET Interface** 8-pin DIN Female | 8-pin DIN Male

**RET Interface, quantity** 2 female | 2 male

Input Voltage 10-30 Vdc

Internal Bias Tee Port 1 | Port 3

ANDREW®
an Amphenol company

Internal RET Low band (1) | Mid band (1)

Power Consumption, active state, maximum 10 W

Power Consumption, idle state, maximum 2 W

**Protocol** 3GPP/AISG 2.0 (Single RET)

#### **Dimensions**


 Width
 301 mm | 11.85 in

 Depth
 181 mm | 7.126 in

 Length
 2438 mm | 95.984 in

 Net Weight, without mounting kit
 24.7 kg | 54.454 lb


## Array Layout



Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	698-896	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxxR1
B1	1695-2200	3 - 4	65°		AISG2	60 01
B2	1695-2200	5 - 6	65°	2	AISGZ	CPxxxxxxxxxxxxxxB1
P1	3550-3700	7 - 8	65°	N1/A	NIA.	N1/A
P2	3550-3700	9 - 10	65°	N/A	NA	N/A

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

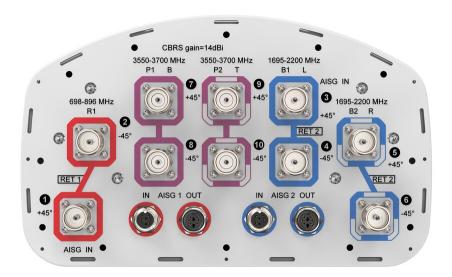

## **Electrical Specifications**

**Impedance** 50 ohm

**Operating Frequency Band** 1695 – 2200 MHz | 3550 – 3700 MHz | 698 – 896 MHz

Polarization ±45°

**Total Input Power, maximum** 1,000 W @ 50 °C

## **Electrical Specifications**

Frequency Band, MHz	698-806	806-896	1695-1880	1850-1990	1920-2200	3550-3700
Gain, dBi	15.6	15.8	17.5	17.7	18.1	12.9
Beamwidth, Horizontal, degrees	69	67	65	62	63	62
Beamwidth, Vertical, degrees	8.9	8	5.6	5.3	5.1	17.3
Beam Tilt, degrees	0-11	0-11	0-7	0-7	0-7	8
USLS (First Lobe), dB	18	17	18	17	18	14
Front-to-Back Ratio at 180°, dB	34	35	31	34	31	34
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0

Page 3 of 4



PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-145
Input Power per Port at 50°C,	300	300	250	250	250	100

maximum, watts

## Mechanical Specifications

Wind Loading @ Velocity, frontal	393.0 N @ 150 km/h (88.3 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	330.0 N @ 150 km/h (74.2 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	757.0 N @ 150 km/h (170.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	398.0 N @ 150 km/h (89.5 lbf @ 150 km/h)

Wind Speed, maximum 241 km/h (150 mph)

## Packaging and Weights

Width, packed	441 mm   17.362 in
Depth, packed	337 mm   13.268 in
Length, packed	2583 mm   101.693 in
Weight, gross	37.4 kg   82.453 lb

## Regulatory Compliance/Certifications

•	0. 17. 1
Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



#### Included Products

BSAMNT-3 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## \* Footnotes

**Performance Note** Severe environmental conditions may degrade optimum performance

