

Installation Instructions

MT-DRYER

Bulletin AE01B-A0602-003

Version 00 Status RE Rev A

Model Version 03 Status RE Rev A

Andrew Institute offers installation training.

Description

Dryer tube replacement kit, MT050C and MT500D

Notice

The installation, maintenance or removal of dehydrator systems requires qualified, experienced personnel. Commscope installation instructions have been written for such personnel. Dehydrator systems should be inspected once a year by qualified personnel to verify proper installation, maintenance, and condition of equipment.

Commscope disclaims any liability or responsibility for the results of improper or unsafe installation practices.

Table 1. Parts List

Item	Description	Qty
1	DRYER TUBE ASSEMBLY	1
2	HEAVY CABLE TIES	2
3	INSTALLATION INSTRUCTION	1
4		
5		
6		



Main Hazards – Health Effects

Eyes: May cause irritation.

Inhalation: Viscous nature may block breathing passages if inhaled.

Ingestion: May cause diarrhoea.

Skin: For hypersensitive persons, may irritate the skin after long periods of contact.

Respiratory Protection: None needed.

Hand Protection: Protective gloves for hypersensitive persons.

Eye Protection: Glasses, if applied to parts in motion.

Body Protection: Overalls.

Tools Required

CLIPPERS/SHEARS

Andrew Solutions

Customer Service 24 hours

U.S.A., Canada, Mexico: 1-800-255-1479

or 1-888-235-5732

U.K.: 0800 250055

Other Europe: +44 592 782 612

www.commscope.com/andrew

Visit our Web site at www.commscope.com/andrew or contact your local Andrew Solutions representative for more information.

© 2008 CommScope, Inc. All rights reserved.

Andrew Solutions is a trademark of CommScope. All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to Andrew Solutions products or services.

Notice: Andrew disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.

Aviso: Andrew no acepta ninguna obligación ni responsabilidad como resultado de practicas incorrectas o peligrosas de instalacion, inspección, mantenimiento o retire.

Avis : Andrew decline toute responsabilité pour les consequences de procedures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.

Hinweis: Andrew lehnt jede Haftung Oder Verantwortung für Schaden ab, die aufgrund unsachgemaBer Installation, Überprüfung, Wartung Oder Demontage auftreten.

Atencao: A Andrew abdica do direito de toda responsabilidade pelos resultados de praticas inadequadas e sem seguranca de instalacao, inspecao, manutengao ou remocao.

Awertenza: Andrew declina eventual! responsabilita denvanti dell'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.

注意：Andrew 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負任何義務和責任




Installation Instructions

MT-DRYER

AE01B-A0602-003

Version 00 Status RE Rev A

Model Version 03 Status RE Rev A

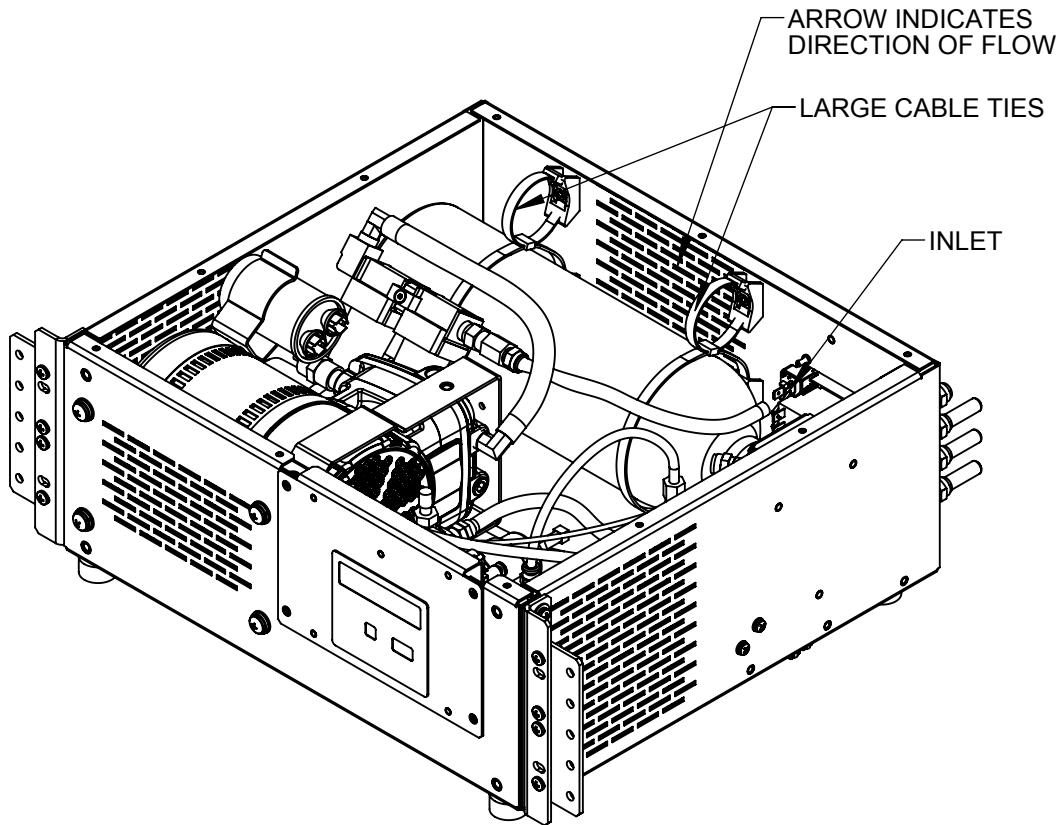

1. TURN OFF THE POWER TO THE UNIT, REMOVE THE POWER CORD AND REMOVE THE COVER. THE IMAGE ABOVE IS THE RACK-MOUNT CONFIGURATION.
2. LOOSEN THE COMPRESSION NUT TO REMOVE THE TUBING AT THE DRYER INLET.
3. **MT050C** - LOOSEN THE COMPRESSION NUT AT THE TANK INLET WHERE THE DRYER OUTPUT HOSE CONNECTS TO REMOVE THE TUBING FROM THE TANK. LEAVE THE OUTPUT TUBING CONNECTED TO THE DRYER TUBE.
4. **MT500D** - LOOSEN THE COMPRESSION NUT AT THE BACK PRESSURE REGULATOR INLET WHERE THE DRYER OUTPUT HOSE CONNECTS TO REMOVE THE TUBING FROM THE REGULATOR. LEAVE THE OUTPUT TUBING CONNECTED TO THE DRYER TUBE.
5. CUT THE LARGE CABLE TIES THAT HOLD THE DRYER TUBE TO THE MOUNTING SADDLES.
6. PLACE THE NEW CABLE TIES THROUGH THE SLOTS IN THE MOUNTING SADDLES.
7. REINSTALL DRYER TUBE AND SECURE BY TIGHTENING THE CABLE TIES.
8. RECONNECT THE TUBING CONNECTIONS.