

Installation Instructions


TC-1497-IP Rev. A, April 2021

FIST-GC02 External Cable Fixation Brackets


1 BX8

A cable securing system can be mounted on to the base of the FIST-GCO2-BX8. This allows cables to be secured outside the closure.

Note: A short version and a long version are available.

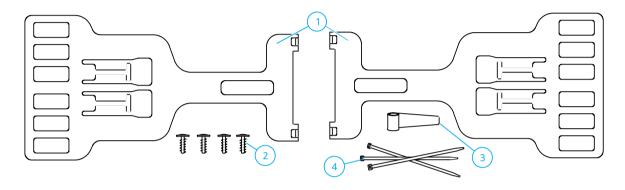


N°	Description	Qty	N°	Description	Qty
1	Cable fixation plate	2	3	Foam	1
2	Screws	4	4	Cable ties	20

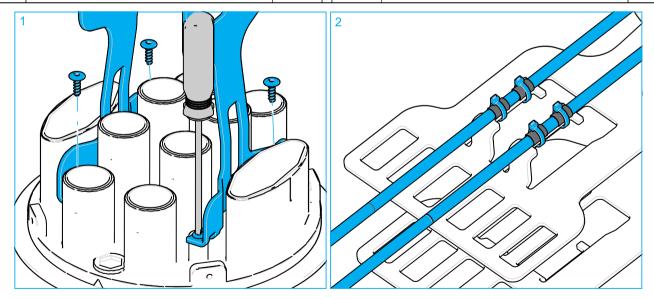


- 1 Mount the frame to the base with the screws.
- 2 Apply some foam to the cable(s) and secure with cable tie(s) to the frame.

2 BX6


A cable securing system can be mounted on to the base of the FIST-GCO2-BX6. This allows cables to be secured outside the closure.

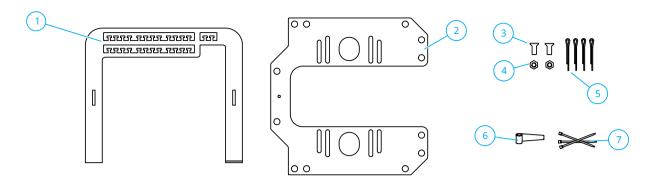

N°	Description	Qty	N°	Description	Qty
1	Multi out cable fixation plate	1	5	Split pin	4
2	Base plate	1	6	Foam	1
3	Screw 8x20	2	7	Cable ties	20
4	Nut	2			

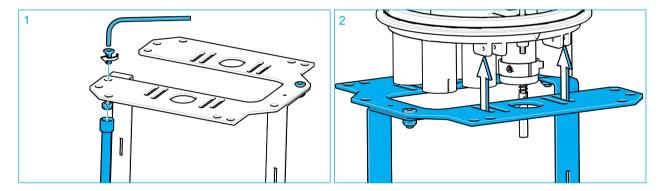


- 1 Secure the cable securing frame to the base plate.
- 2 Mount the base plate on the closure.

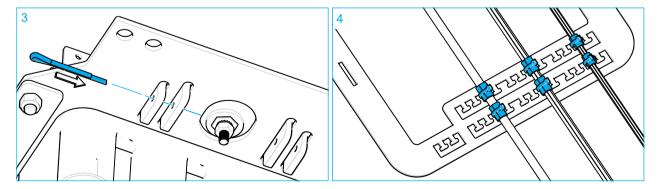


- 3 Secure the base plate with the split pins (x4).
- 4 Apply some foam to the cable(s) and secure with cable tie(s) to the frame.

3 FX

A cable securing frame can be mounted onto the base of the FIST-GCO2-FX. This allows cables to be secured outside the closure. The marks '4' and '7' must be nearest to the corresponding ports.

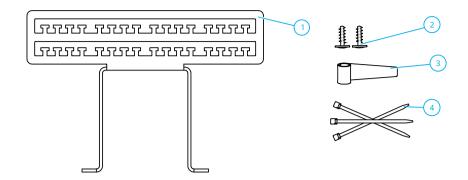

N°	Description	Qty	N°	Description	Qty
1	Cable fixation plate	1	3	Foam	1
2	Screws	2	4	Cable ties	20

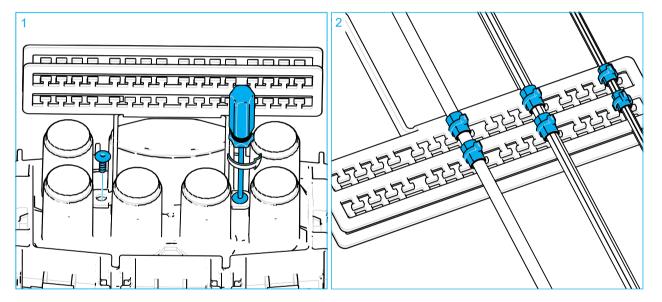

- 1 Mount the frame to the base with the screws.
- 2 Apply some foam to the cable(s) and secure with cable tie(s) to the frame.