

Fiber OSP cable, LazrSPEED® Single Jacket/Single Armor, Gel-Filled, 48 fibers, Outdoor Central Tube, Multimode OM3, Feet jacket marking, Black jacket color

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	O-CA


## General Specifications

Armor Type	Corrugated steel
Cable Type	Central loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Feet
Subunit, quantity	4
Fibers per Subunit, quantity	12
Total Fiber Count	48

## Dimensions

Buffer Tube/Subunit Diameter	6 mm   0.236 in
Diameter Over Jacket	13 mm   0.512 in

## Representative Image

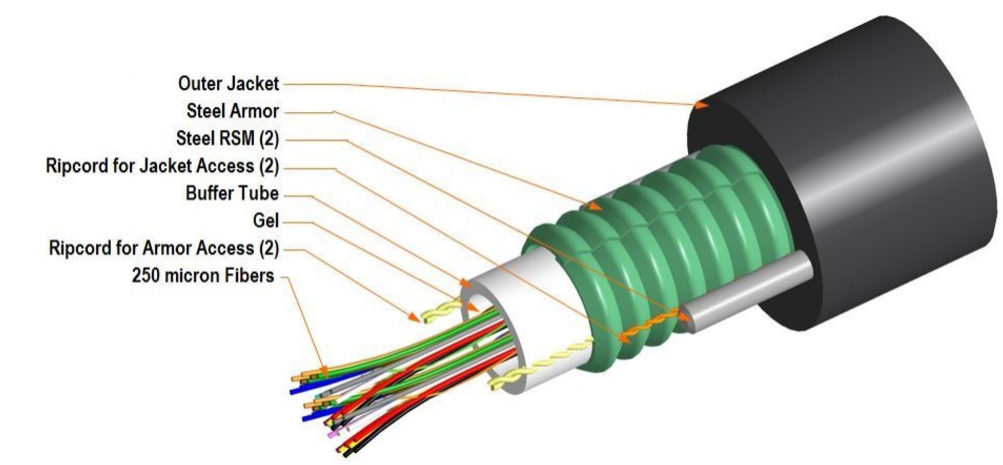

Material Specifications

Jacket MaterialPE

Mechanical Specifications

Minimum Bend Radius, loaded	195 mm   7.677 in
Minimum Bend Radius, unloaded	130 mm   5.118 in
Tensile Load, long term, maximum	800 N   179.847 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	44 N/mm   251.246 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	2.94 N-m   26.021 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	464 m   1,522.31 ft

Optical Specifications

Fiber TypeOM3, LazrSPEED® 300 | OM3, LazrSPEED® 300

## Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-87-640   EN 187105
Environmental Space	Aerial, lashed   Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

Cable Freeze	-2 °C   28.4 °F
Cable Freeze Test Method	FOTP-98   IEC 60794-1 F15
Drip	70 °C   158 °F
Drip Test Method	FOTP-81   IEC 60794-1 E14
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

Cable weight	176 kg/km   118.267 lb/kft
--------------	----------------------------

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

CS-5L-LT	– LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber
----------	---

### \* Footnotes

# 760151852 | O-048-CA-5L-F12NS

---

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable