EH0491-000 | TENIO-B6-S12-8-N



TENIO™ Small Fiber Optic Splice Closure, Gel Cable sealing, 8 preinstalled 12-splice trays

- Single-ended, toolless closure for splicing feeder, access and drop cables
- Features modular building blocks that fastens installation and reduces inventory
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- Compatible with CommScope's CWDM modules and optical splitter trays

Product Classification

Regional Availability EMEA

Product Type Single-ended, rectangular fiber closure

Product Brand TENIO™
Product Series TENIO

General Specifications

 Cable Entry Drop Port Style
 Gel block

 Cable Entry Main Port Style
 Gel block

Cable Ports Quantity, total 6 multi-out ports (30 cables)

Cable Sealing Type Compressed gel

Closure Sealing Type Side latch

Closure Style Single-ended

Color Black
Flash Test Valve None
Mounting Wall

Network Area Type Distribution | Drop

Splice Tray Included, quantity 8

Splice Tray Type Included 12-way, heat shrink

Splices per Tray, quantity 12
Splicing Capacity, Single Fusion, maximum 144

Splicing Type, Supported Single fusion

Dimensions

Height 230 mm | 9.055 in

Page 1 of 3


EH0491-000 | TENIO-B6-S12-8-N

 Width
 134 mm | 5.276 in

 Length
 389 mm | 15.315 in

 Main Cable Diameter, maximum
 16 mm | 0.63 in

Ordering Tree

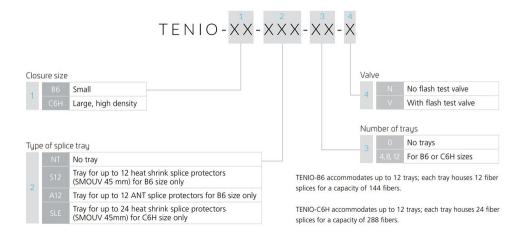

Material Specifications

Material Type Impact-resistant polymer

Environmental Specifications

Environmental SpaceBelow ground| BuriedQualification StandardsIEC 61300, 2 m waterhead

Packaging and Weights

Packaging quantity

Packaging TypeBox| CartonWeight, net1 kg | 2.205 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



TENIO-B6-S12-8-N EH0491-000

UK-ROHS

Compliant



