


# UQV2PLCHF

Base Product



## Ultra Low Loss OM5 MPO24 Unpinned to LC/UPC 24-Fiber Plenum Array Cord

### Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber array cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

### General Specifications


Color, boot A	Red
Color, connector A	Lime green
Color, boot B	Lime green
Color, connector B	Beige
Construction Type	Stranded
Furcation Color	Lime green
Interface, Connector A	MPO-24/UPC Female
Interface, Connector B	LC/UPC
Jacket Color	Lime green
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	24
Total Fibers, quantity	24

### Dimensions

Breakout Length	33 in
Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

# UQV2PLCHF

## Ordering Tree

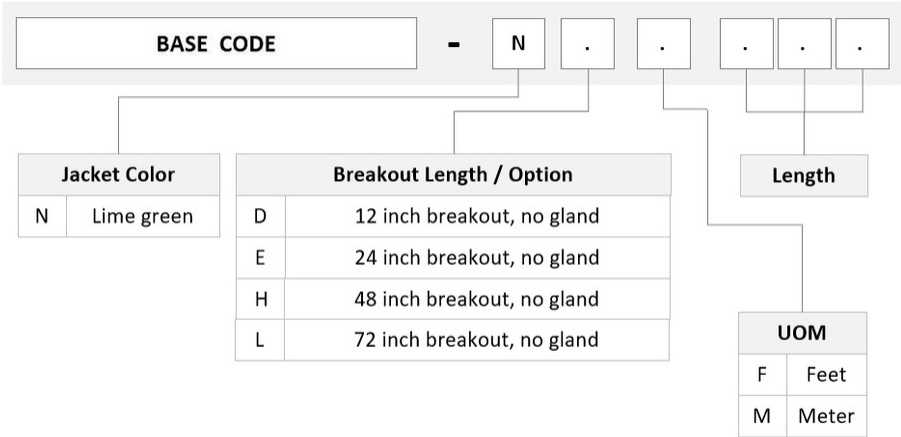

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM5, LazrSPEED®

## Environmental Specifications


**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Indoor | Plenum

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

## Included Products

- |                   |   |  |
|-------------------|---|--|
| 760235986         | – | Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 24 fiber, Multimode |
| P-024-MP-5G-F36LM |   | OM5, Feet jacket marking, Lime green jacket color  |
| 860634624         | – | LazrSPEED® Elite MPO Female 24 Fiber Connector, lime green                               |
| 860649627         | – | LC/UPC Connector, Multimode, Beige, Short Boot   |



Fiber indoor cable, LazrSPEED® Plenum MPO Light Duty for Patchcords, 24 fiber, Multimode OM5, Feet jacket marking, Lime green jacket color

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-MP


## General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Total Fiber Count	24

## Dimensions

Diameter Over Jacket	3.6 mm   0.142 in
----------------------	-------------------

## Representative Image

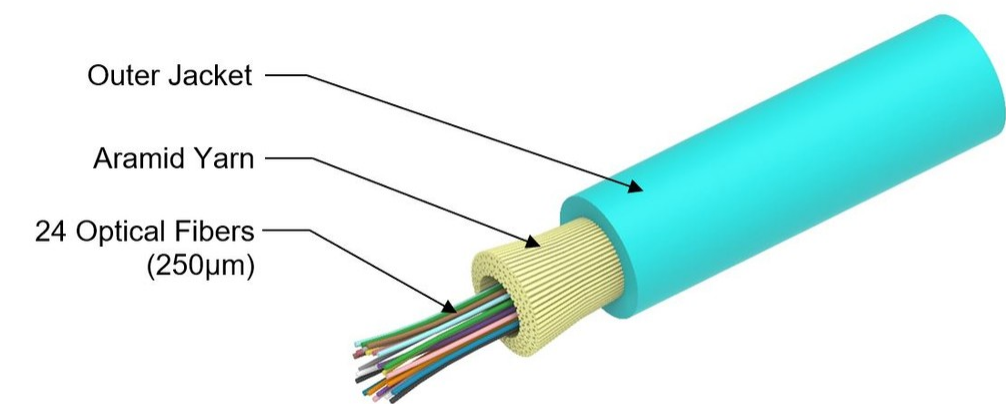

## Mechanical Specifications

Minimum Bend Radius, loaded	54 mm   2.126 in
Minimum Bend Radius, unloaded	29 mm   1.142 in
Tensile Load, long term, maximum	120 N   26.977 lbf
Tensile Load, short term, maximum	400 N   89.924 lbf
Compression	4 N/mm   22.841 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	500 m   1,640.42 ft

## Optical Specifications

Fiber Type	OM5, LazrSPEED® wideband   OM5, LazrSPEED® wideband
------------	---

## Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)

Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

### Environmental Test Specifications

Heat Age	0 °C to +85 °C (+32 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

### Packaging and Weights

Cable weight	12 kg/km   8.064 lb/kft
--------------	-------------------------

### Regulatory Compliance/Certifications


Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant
UK-ROHS	Compliant



### \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

LazrSPEED® Elite MPO Female 24 Fiber Connector, lime green

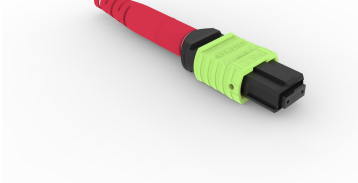

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	LazrSPEED®

General Specifications

Color	Lime green
Color, boot	Red
Ferrule Geometry	Flat
Interface	MPO/UPC Female
Interface Feature	Unpinned
Total Fiber Count	24

Dimensions

Length	60.1 mm   2.366 in
Compatible Cable Diameter	3 mm   0.118 in

Material Specifications

Ferrule Material	Polymer
------------------	---------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM5, LazrSPEED® wideband
Insertion Loss Change, mating	0.3 dB

Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss Change, temperature	0.3 dB
Insertion Loss, maximum	0.27 dB
Insertion Loss, ULL, maximum	0.2 dB
Return Loss, minimum	27 dB

Packaging and Weights

Packaging quantity	1
--------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



\* Footnotes

Insertion Loss Change, mating	TIA-568: Maximum insertion loss change after 500 matings
Insertion Loss Change, temperature	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)

LC/UPC Connector, Multimode, Beige, Short Boot

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Beige
Color, housing	Beige
Interface	LC/UPC

Dimensions

Length	41.6 mm   1.638 in
--------	--------------------

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Mode	Multimode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D   IEC 61753-1
Insertion Loss Change, temperature	0.3 dB
Insertion Loss, maximum	0.15 dB
Return Loss, minimum	35 dB

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>



ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



\* Footnotes

<b>Insertion Loss Change, mating</b>	TIA-568: Maximum insertion loss change after 500 matings
<b>Insertion Loss Change, temperature</b>	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)