

Fiber indoor/outdoor cable, LightScope® ZWP, Gel-Filled loose tube, Singlemode G.652.D, 6 fiber, Meters jacket marking, Yellow jacket color, Eca flame rating

## OBSOLETE

This product was discontinued on: March 31, 2023

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor/outdoor cable
<b>Product Series</b>	C-DN


## General Specifications

<b>Cable Type</b>	Central loose tube
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-filled
<b>Jacket Color</b>	Yellow
<b>Jacket Marking</b>	Meters
<b>Fibers per Subunit, quantity</b>	6
<b>Total Fiber Count</b>	6

## Dimensions

<b>Cable Length</b>	1000 m   3,280.84 ft
<b>Buffer Tube/Subunit Diameter</b>	2.8 mm   0.11 in
<b>Diameter Over Jacket</b>	6.4 mm   0.252 in

## Representative Image

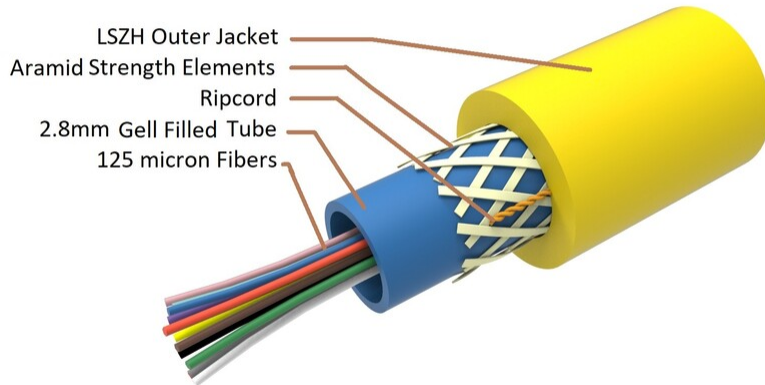

## Mechanical Specifications

<b>Minimum Bend Radius, loaded</b>	130 mm   5.118 in
<b>Minimum Bend Radius, unloaded</b>	75 mm   2.953 in
<b>Tensile Load, long term, maximum</b>	400 N   89.924 lbf
<b>Tensile Load, short term, maximum</b>	530 N   119.149 lbf
<b>Cable Crush Resistance, maximum</b>	20 N/mm   114.203 lb/in
<b>Compression Test Method</b>	IEC 60794-1-2 E3
<b>Impact</b>	5 N-m   44.254 in lb
<b>Impact Test Method</b>	IEC 60794-1 E4

## Optical Specifications

<b>Fiber Type</b>	G.652.D   OS2
-------------------	---------------

## Optical Specifications, Wavelength Specific

<b>Attenuation, maximum</b>	0.35 dB/km @ 1,300 nm
-----------------------------	-----------------------

## Environmental Specifications

<b>Installation temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Operating Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)

<b>Storage Temperature</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Eca
<b>Environmental Space</b>	Universal Low Smoke Zero Halogen (ULSZH)
<b>Water Penetration</b>	24 h

## Environmental Test Specifications

<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	IEC 60794-1-2 F1

## Packaging and Weights

<b>Cable weight</b>	44 kg/km   29.567 lb/kft
---------------------	--------------------------

## Included Products

CS-8W-250-EMEA – LightScope® ZWP Singlemode Fiber  
250um

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable