760245212 | OTE200-06MH-18-S12-B-W



Mini-OTE 200-Series, Optical Terminal Enclosure, 6-port full-size connector, 1x8 splitter, black, wall mount

- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Functionality to splice and store feeder cable in the field with the possibility to splice in the field two extra branch cables
- Hardened adapters are factory-terminated and environmentally sealed to ensure rapid plug-and play drop cable installations
- Integrated external cable fixation guarantees easy, fast and reliable cable manipulations

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America

Product Type Access terminal, without splitter/tap

Product Series Mini-OTE 200

General Specifications

Cable Type No cable (stubless)

Cable, quantity 0

Distribution Type 1 x 8 splitter

Enclosure Color Black

 Mounting
 Handhole
 Pole
 Wall

 Port Type
 Hardened full-size SC/APC

Port, quantity 6

Split Ratio Symmetrical

Splitter, quantity

Stub Type No tail

Dimensions

Height 358.5 mm | 14.114 in

Width 166 mm | 6.535 in


Depth 129.3 mm | 5.091 in


Cable Length, stub 0 ft (0 m)


Dimension Drawing

COMMSC PE°


760245212 | OTE200-06MH-18-S12-B-W







Ordering Tree

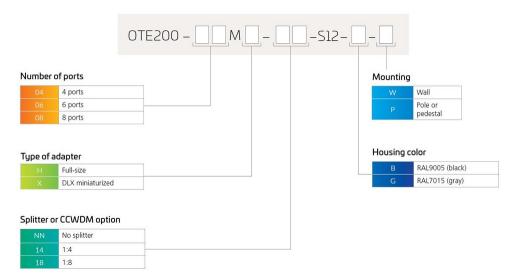

Material Specifications

Enclosure Material Type Glass filled polypropylene (GF-PP)

Optical Specifications

Fiber Type G.652.D

Operating Wavelength Range 1260 – 1635 nm

Attenuation Terminal Connectors, maximum 0.4 dB

Page 2 of 4

760245212 | OTE200-06MH-18-S12-B-W

Insertion Loss, Terminal Connector, typical0.16 dBReturn Loss, Connector, minimum65 dB

Environmental Specifications

Operating Temperature $-40 \,^{\circ}\text{C}$ to $+65 \,^{\circ}\text{C}$ ($-40 \,^{\circ}\text{F}$ to $+149 \,^{\circ}\text{F}$)

Relative Humidity 5%–100%, condensing

Environmental Space Above ground | Below ground | Buried

Qualification Standards IEC 60529, IP68 + 3 m waterhead

UV Resistance UV stabilized

Packaging and Weights

Included Cable termination unit (2) | Enclosure (1) | Fiber pigtail cassette

(1) | Splice Cassette (2)

Packaging quantity

Packaging Type Box | Carton

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted



Included Products

CW8094-002 - TENIO™ Cable Termination Unit kit

TENIO-CTU-L-(10)



CW8094-002 | TENIO-CTU-L-(10)





Product Classification

Regional Availability EMEA

Product Type Cable termination kit

Product Series TENIO

Environmental Specifications

Environmental Space Outdoor

Packaging and Weights

Packaging quantity 1

Packaging Type Bag | Carton

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



