

Fiber outdoor drop cable, LightScope® ZWP Self-Supporting All-Dielectric, Singlemode G.652.D and G.657.A1, 12 fiber Arid Core construction, Gel-filled, central loose tube, no ripcords, Meters jacket marking, Black jacket color

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	CommScope®
Product Type	Fiber drop cable
Product Series	O-DF


General Specifications

Cable Type	Central loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Feet
Subunit, quantity	1
Fibers per Subunit, quantity	12
Total Fiber Count	12

Dimensions

Height Over Jacket	4.3 mm 0.169 in
Buffer Tube/Subunit Diameter	2 mm 0.079 in
Diameter Over Jacket	8 mm 0.315 in

Representative Image

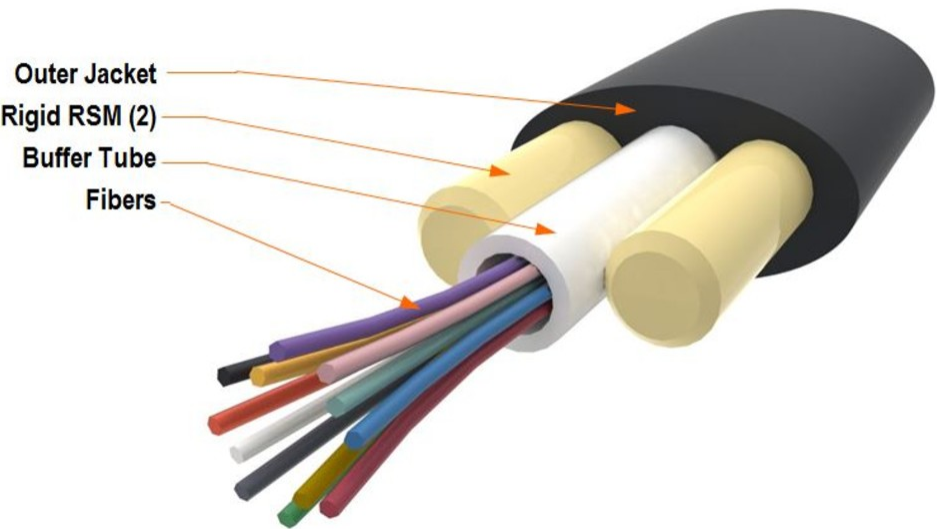

Material Specifications

Jacket Material	PE
-----------------	----

Mechanical Specifications

Minimum Bend Radius, loaded	86 mm 3.386 in
Minimum Bend Radius, unloaded	81 mm 3.189 in
Tensile Load, long term, maximum	400 N 89.924 lbf
Tensile Load, short term, maximum	1334 N 299.895 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	35 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	1047 m 3,435.039 ft

Optical Specifications

Fiber Type

G.652.D and G.657.A1 | G.652.D and G.657.A1

Environmental Specifications

Installation temperature

-30 °C to +70 °C (-22 °F to +158 °F)

Operating Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Storage Temperature

-40 °C to +75 °C (-40 °F to +167 °F)

Cable Qualification Standards

ANSI/ICEA S-110-717

Environmental Space

Aerial, self-support | Buried

Jacket UV Resistance

UV stabilized

Water Penetration

24 h

Water Penetration Test Method

FOTP-82 | IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze

-2 °C | 28.4 °F

Cable Freeze Test Method

FOTP-98 | IEC 60794-1 F15

Drip

70 °C | 158 °F

Drip Test Method

FOTP-81 | IEC 60794-1 E14

Heat Age

-40 °C to +85 °C (-40 °F to +185 °F)

Heat Age Test Method

IEC 60794-1 F9

Low High Bend

-30 °C to +60 °C (-22 °F to +140 °F)

Low High Bend Test Method

FOTP-37 | IEC 60794-1 E11

Temperature Cycle

-40 °C to +70 °C (-40 °F to +158 °F)

Temperature Cycle Test Method

FOTP-3 | IEC 60794-1 F1

Packaging and Weights

Cable weight

39 kg/km | 26.207 lb/kft

Included Products

DB-8W1-LT – LightScope® ZWP Singlemode Fiber

* Footnotes

810009915/DB | O-012-DF-8W1-M12NS/NR

Operating Temperature Specification applicable to non-terminated bulk fiber cable