

EGRZZHHTT-65A-R8



18-port sector antenna, 2x 694–862, 2x 880–960, 2x 694–960, 4x 1427–2690, 4x 1695–2180 and 4x 2490–2690 MHz, 65° HPBW, 8x RET

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- Antenna shape optimized for wind load reduction

General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, mid band	12
RF Connector Quantity, low band	6
RF Connector Quantity, total	18

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	Low band (3) Mid band (5)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

EGRZZHHTT-65A-R8

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	1600 mm 62.992 in
Net Weight, antenna only	40.4 kg 89.067 lb

Array Layout

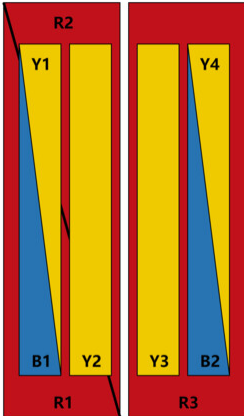

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	694-862	1 - 2	1	AISG1	CPxxxxxxxxxxxxxxxxR1
R2	880-960	3 - 4	2	AISG1	CPxxxxxxxxxxxxxxxxR2
R3	694-960	5 - 6	3	AISG1	CPxxxxxxxxxxxxxxxxR3
B1	1695-2180	7 - 8	4	AISG1	CPxxxxxxxxxxxxxxxxB1
B2	1695-2180	9 - 10	5	AISG1	CPxxxxxxxxxxxxxxxxB2
Y1	2490-2690	11 - 12	6	AISG1	CPxxxxxxxxxxxxxxxxY1
Y4	2490-2690	17 - 18			
Y2	1427-2690	13 - 14	7	AISG1	CPxxxxxxxxxxxxxxxxY2
Y3	1427-2690	15 - 16	8	AISG1	CPxxxxxxxxxxxxxxxxY3

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



Electrical Specifications

EGRZZHHTT-65A-R8

Impedance	50 ohm
Operating Frequency Band	1427 – 2690 MHz 1695 – 2180 MHz 2490 – 2690 MHz 694 – 862 MHz 694 – 960 MHz 880 – 960 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

Electrical Specifications

	R1	R1	R2	R3	R3	R3
Frequency Band, MHz	698–806	790–862	880–960	698–806	790–894	890–960
RF Port	1,2	1,2	3,4	5,6	5,6	5,6
Gain at Mid Tilt, dBi	13.4	13.6	13.8	13.9	14.3	14.4
Beamwidth, Horizontal, degrees	71	67	65	71	67	65
Beamwidth, Vertical, degrees	13.5	12.7	11.7	13.8	12.7	11.6
Beam Tilt, degrees	3–16	3–16	3–16	3–16	3–16	3–16
USLS (First Lobe), dB	16	15	13	16	17	16
Front-to-Back Ratio at 180°, dB	30	30	28	30	27	28
Front-to-Back Total Power at 180° ± 30°, dB	20	20	20	19	20	21
Isolation, Cross Polarization, dB	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	300	300	300	300	300	300

Electrical Specifications, BASTA

	698–806	790–862	880–960	698–806	790–894	890–960
Frequency Band, MHz	698–806	790–862	880–960	698–806	790–894	890–960
Gain by all Beam Tilts, average, dBi	13.3	13.5	13.6	13.8	14.2	14.3
Gain by all Beam Tilts Tolerance, dB	±0.5	±0.4	±0.4	±0.3	±0.5	±0.4
Beamwidth, Horizontal Tolerance, degrees	±10	±5	±3	±7	±4	±5
Beamwidth, Vertical Tolerance, degrees	±0.9	±0.6	±1	±1	±0.9	±0.9

EGRZZHHTT-65A-R8

USLS, beampeak to 20° above beampeak, dB	16	15	13		16	15
CPR at Boresight, dB	20	19	18	20	20	18
CPR at Sector, dB	12	9	11	12	10	12

Electrical Specifications

	B1,B2	B1,B2	Y1,Y4	Y2,Y3	Y2,Y3	Y2,Y3	Y2,Y3	Y2,Y3
Frequency Band, MHz	1695–1995	1920–2180	2490–2690	1427–1518	1695–1995	1920–2300	2300–2500	2490–2690
RF Port	7-10	7-10	11,12,17,18	13-16	13-16	13-16	13-16	13-16
Gain at Mid Tilt, dBi	16.7	17.5	17.8	15.4	16.9	17.7	18.2	18.1
Beamwidth, Horizontal, degrees	69	63	56	73	64	60	58	57
Beamwidth, Vertical, degrees	6.1	5.6	4.6	8	6.4	5.7	4.9	4.6
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	16	17	17	16	16	16	16
Front-to-Back Ratio at 180°, dB	32	31	31	31	32	32	31	30
Front-to-Back Total Power at 180° ± 30°, dB	26	25	26	24	26	26	26	26
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	150	250	250	250	200	200

Electrical Specifications, BASTA

	1695–1995	1920–2180	2490–2690	1427–1518	1695–1995	1920–2300	2300–2500	2490–2690
Frequency Band, MHz								
Gain by all Beam Tilts, average, dBi	16.6	17.3	17.6	15.4	16.8	17.5	17.9	17.8
Gain by all Beam Tilts Tolerance, dB	±0.9	±0.5	±0.5	±0.3	±0.6	±0.5	±0.5	±0.9
Beamwidth, Horizontal Tolerance, degrees	±7	±7	±4	±8	±5	±3	±6	±8
Beamwidth, Vertical Tolerance, degrees	±0.5	±0.4	±0.2	±0.3	±0.5	±0.5	±0.3	±0.3
USLS, beampeak to 20° above beampeak, dB	14	14	12	13	15	15	16	16

EGRZZHHTT-65A-R8

CPR at Boresight, dB	22	22	17	15	21	19	19	19
CPR at Sector, dB	4	4	1	8	6	4	4	2

Mechanical Specifications

Wind Loading @ Velocity, frontal	544.0 N @ 150 km/h (122.3 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	142.0 N @ 150 km/h (31.9 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	723.0 N @ 150 km/h (162.5 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	374.0 N @ 150 km/h (84.1 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	368 mm 14.488 in
Length, packed	1775 mm 69.882 in
Weight, gross	54.2 kg 119.49 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted




Included Products

BSAMNT-4	-	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---

BSAMNT-4

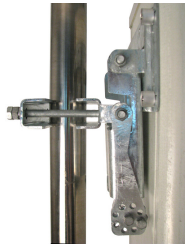

Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.5 kg | 14.33 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

