


# 810009731/DB/GS | B-288-LN-8W-F24NS/17G /200/GS



Fiber OSP cable, Zero Water Peak® Blown Micro Single Jacket All-Dielectric Outdoor Stranded Loose Tube 200um Fiber Arid-Core™ Construction, 288 fiber, Singlemode G.657.A1, Gel-filled, Feet jacket marking, Black jacket color

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	B-LN


## General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Filler, quantity	0
Jacket Color	Black
Jacket Marking	Feet
Jacket Marking Method	Laser
Jacket Marking Text	COMMScope GB (YYYY) 810009731/DB 288 X G657A1 200um (Serial number) (feet) FT
Subunit, quantity	12
Fibers per Subunit, quantity	24
Total Fiber Count	288

## Dimensions

Buffer Tube/Subunit Diameter	1.7 mm   0.067 in
Diameter Over Jacket	9.4 mm   0.37 in

## Representative Image

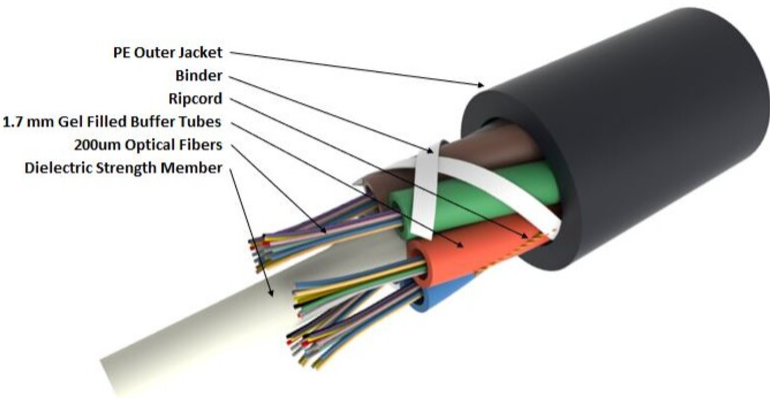

Material Specifications

Jacket Material

High density polyethylene (HDPE)

Mechanical Specifications

Minimum Bend Radius, loaded	143 mm   5.63 in
Minimum Bend Radius, unloaded	95 mm   3.74 in
Tensile Load, long term, maximum	335 N   75.311 lbf
Tensile Load, short term, maximum	1000 N   224.809 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.3 N-m   2.655 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	769 m   2,522.966 ft

### Optical Specifications

Fiber Type

G.657.A1, TeraSPEED®

### Environmental Specifications

Installation temperature

-30 °C to +70 °C (-22 °F to +158 °F)

Operating Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Storage Temperature

-40 °C to +70 °C (-40 °F to +158 °F)

Cable Qualification Standards

IEC 60794-5-10

Environmental Space

Air-blown, microduct

Jacket UV Resistance

UV stabilized

Water Penetration

24 h

Water Penetration Test Method

FOTP-82 | IEC 60794-1 F5

### Environmental Test Specifications

Cable Freeze

-2 °C | 28.4 °F

Cable Freeze Test Method

FOTP-98 | IEC 60794-1 F15

Drip

70 °C | 158 °F

Drip Test Method

FOTP-81 | IEC 60794-1 E14

Heat Age

-40 °C to +85 °C (-40 °F to +185 °F)

Heat Age Test Method

IEC 60794-1 F9

Low High Bend

-30 °C to +60 °C (-22 °F to +140 °F)

Low High Bend Test Method

FOTP-37 | IEC 60794-1 E11

Temperature Cycle

-40 °C to +70 °C (-40 °F to +158 °F)

Temperature Cycle Test Method

FOTP-3 | IEC 60794-1 F1

### Packaging and Weights

Cable weight

77.5 kg/km | 52.078 lb/kft

### Included Products

CS-8W-200-B-LN

–

200 Micron Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber

### \* Footnotes

# 810009731/DB/GS | B-288-LN-8W-F24NS/17G /200/GS

---

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable